

Model:

(91162-147) Centaurus 12 3' lead 12v

(91161-147) Centaurus 12 12v

(91163-147) Centaurus 12 24v

Description: 12V / 24 V Solid Brass Area/Path Light

Lamp Provided: 20 Watt Astro-Brite Lamps – 20 Watt Max

ASSEMBLY / INSTALLATION INSTRUCTIONS:

Please read carefully before installing. Save these instructions.

Tools Required

It is recommended that when installing any low voltage fixture that you have (at a minimum) the following items: voltage meter, amp probe, wire nuts, and assorted hand tools

Fixture Assembly Instructions

1. Remove the lamp from the box and place it in the socket. **(you can touch the bulbs).**
2. Assemble fixture by threading lens onto collar and slip collar onto stem by pressing over the two o-rings until you feel it fully seat.
3. Determine fixture location. Attach the provided stake onto the fixture, until secure. Take care not to twist the wire.
4. Find the point of connection (P.O.C) location and give yourself a 13-15' lead at P.O.C. Then work from P.O.C. back to the fixture location. (NOTE) While not necessary we recommend that you attempt to conceal all additional wire at the fixture rather than cutting off the excess. This helps maintain flexibility and even voltage.
5. **Lamping:** Grasp the collar and stem, using a twisting motion to separate the collar from stem. Re-lamp and reattach collar by pressing over the two o-rings until you feel them seat.


Important safety and maintenance instructions

1. Use with low-voltage outdoor lighting system only.
2. Lamp is hot when lit! Do not touch when lamp is on!
3. Allow fixture to cool before touching or re-lamping fixture!
4. Keep away from materials, structures or landscapes that may burn!
5. Do not operate fixture if cover shield is damaged or missing.
6. Do not submerge fixture in water.
7. Clean fixture with mild soap. Do not use acid or any other solvent base cleaner.

CAUTION: **DO NOT OVERLOAD CABLE or TRANSFORMER** and maintain polarity at all times. For 12 volt systems, keep each fixture between 10.8 and 12.0 operating volts. For 24 volt systems, keep each fixture between 21.6 and 24.0 operating volts. Consult with a qualified electrical contractor and local electrical codes before installing any electrical product.

UNIQUE LIGHTSCAPING™

a brand of Sea Gull Lighting

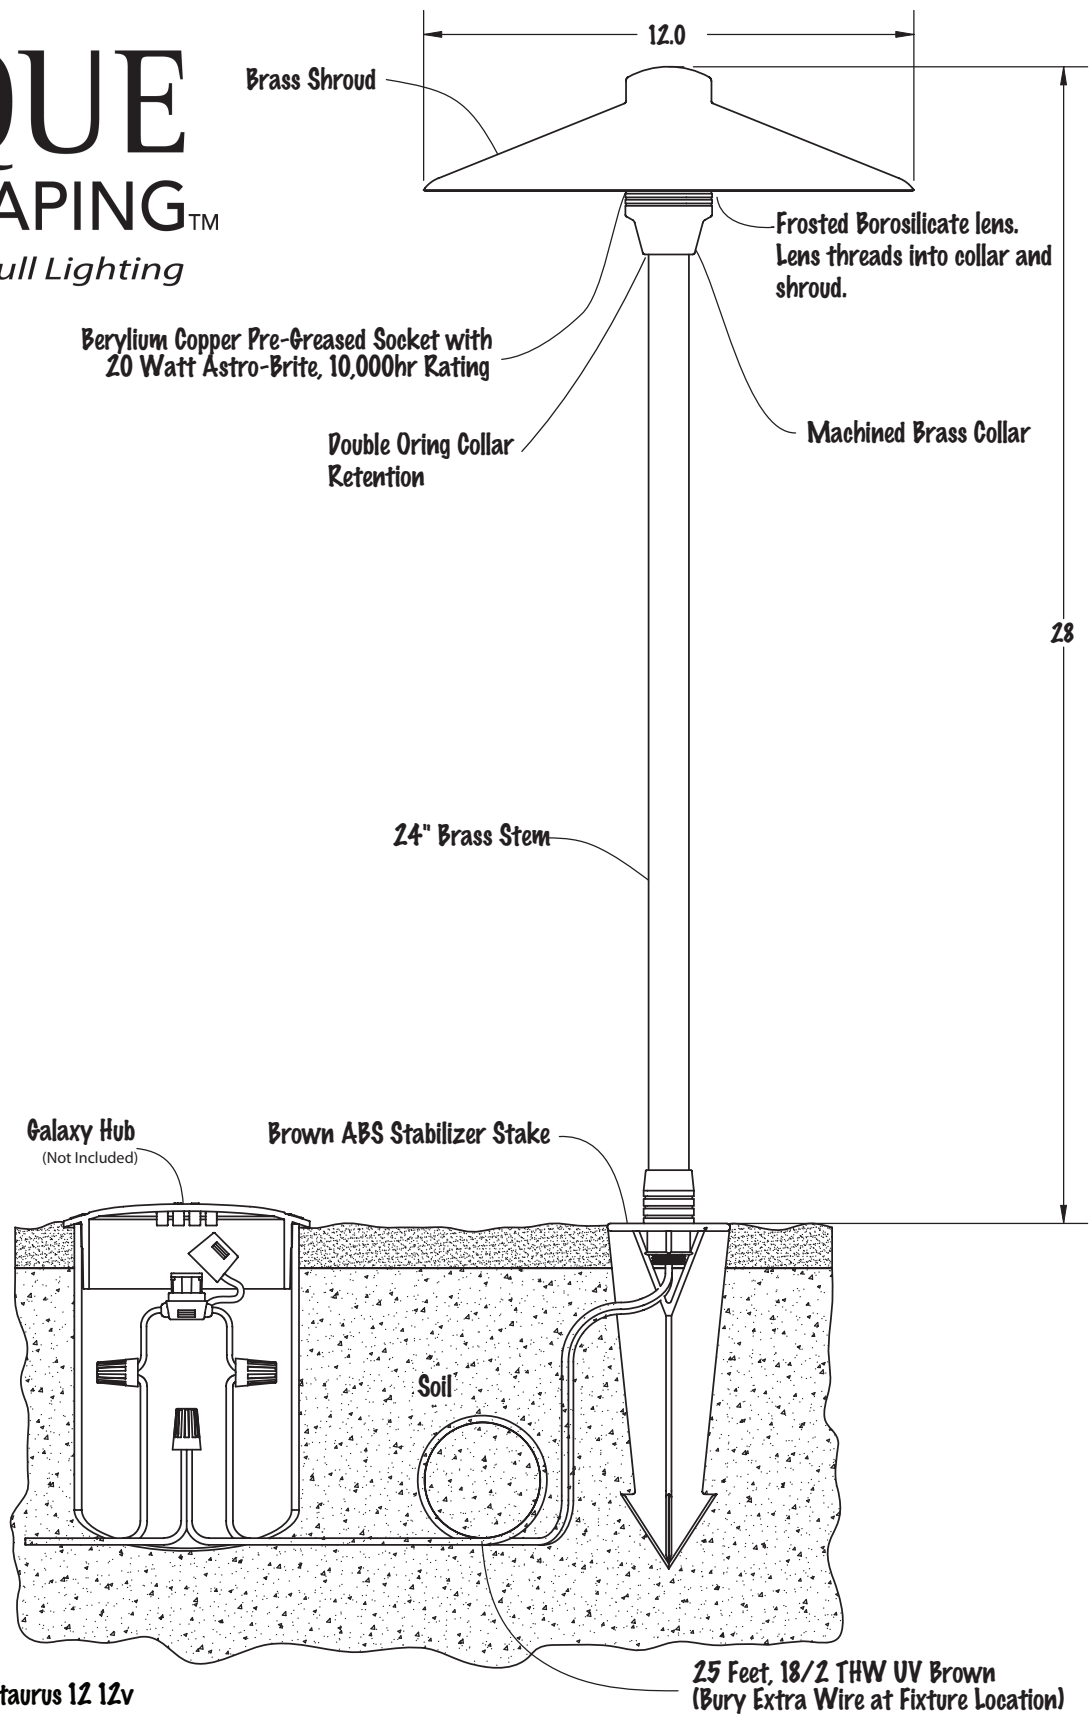

Model Shown: (91161-147) Centaurus 12 12v

- NOTES:
- Lifetime Warranty
 - Maximum Wattage: 20 Watts
 - Included: Removable Borosilicate Glass Lens
 - Level of Light Application: 1 & 2
 - Weathered Brass Finish

FIXTURE NAME

CENTAURUS 12

DESCRIPTION

AREA/PART LIGHT

REV

SCALE: NONE WEIGHT: 4.40 lbs

3-16-09