

Models:

(91237-147) Expedition 12v

(91238-147) Expedition 24v

Description: 12V or 24V Solid Brass Directional Down Lights

Lamps Provided: Astro-Brite 20 Watt Bi-Pin - 20 Watt Max

ASSEMBLY/INSTALLATION INSTRUCTIONS:

Please read carefully before installing. Save these instructions.

TOOLS REQUIRED: It is recommended that when installing any low voltage fixture that you have (at a minimum) the following items: voltage meter, amp probe, wire nuts, and assorted hand tools.

1. Determine fixture location. Attach the supplied Zero-G Docking Post until secure taking care not to twist the wire.
2. Simply pull the 25' wire lead to your connection point (hub/junction box) and connect the two wires. Even though polarity is not an issue, it is recommended that you always match the polarity, that is to say put the lettering-to-lettering wires and the ribbed to ribbed wires together. (NOTE) While not necessary we do recommend that you attempt to conceal all additional wire, rather than cutting off the excess. This helps maintain flexibility and even voltage.
3. Remove the shroud and lens from fixture and place lamp in socket. You may touch the bulb with your hands and not harm it.

Important safety and maintenance instructions


1. Lamp is hot when lit! Do not touch when lamp is on!
2. Allow fixture to cool before touching or re-lamping fixture!
3. Keep away from materials, structures or landscapes that may burn!
4. Do not operate fixture if cover shield is damaged or missing.
5. Do not submerge fixture in water.
6. Clean fixture with mild soap. Do not use acid or any other solvent base cleaner.

CAUTION: DO NOT OVERLOAD CABLE or TRANSFORMER and maintain polarity at all times. For 12 volt systems, keep each fixture between 10.8 and 12.0 operating volts. For 24 volt systems, keep each fixture between 21.6 and 24.0 operating volts. Consult with a qualified electrical contractor and local electrical codes before installing any electrical product.

UNIQUE LIGHTSCAPING™

a brand of Sea Gull Lighting

Beryllium Copper Pre-Greased Socket with 20 Watt Astro-Brite, 5,000hr Rating

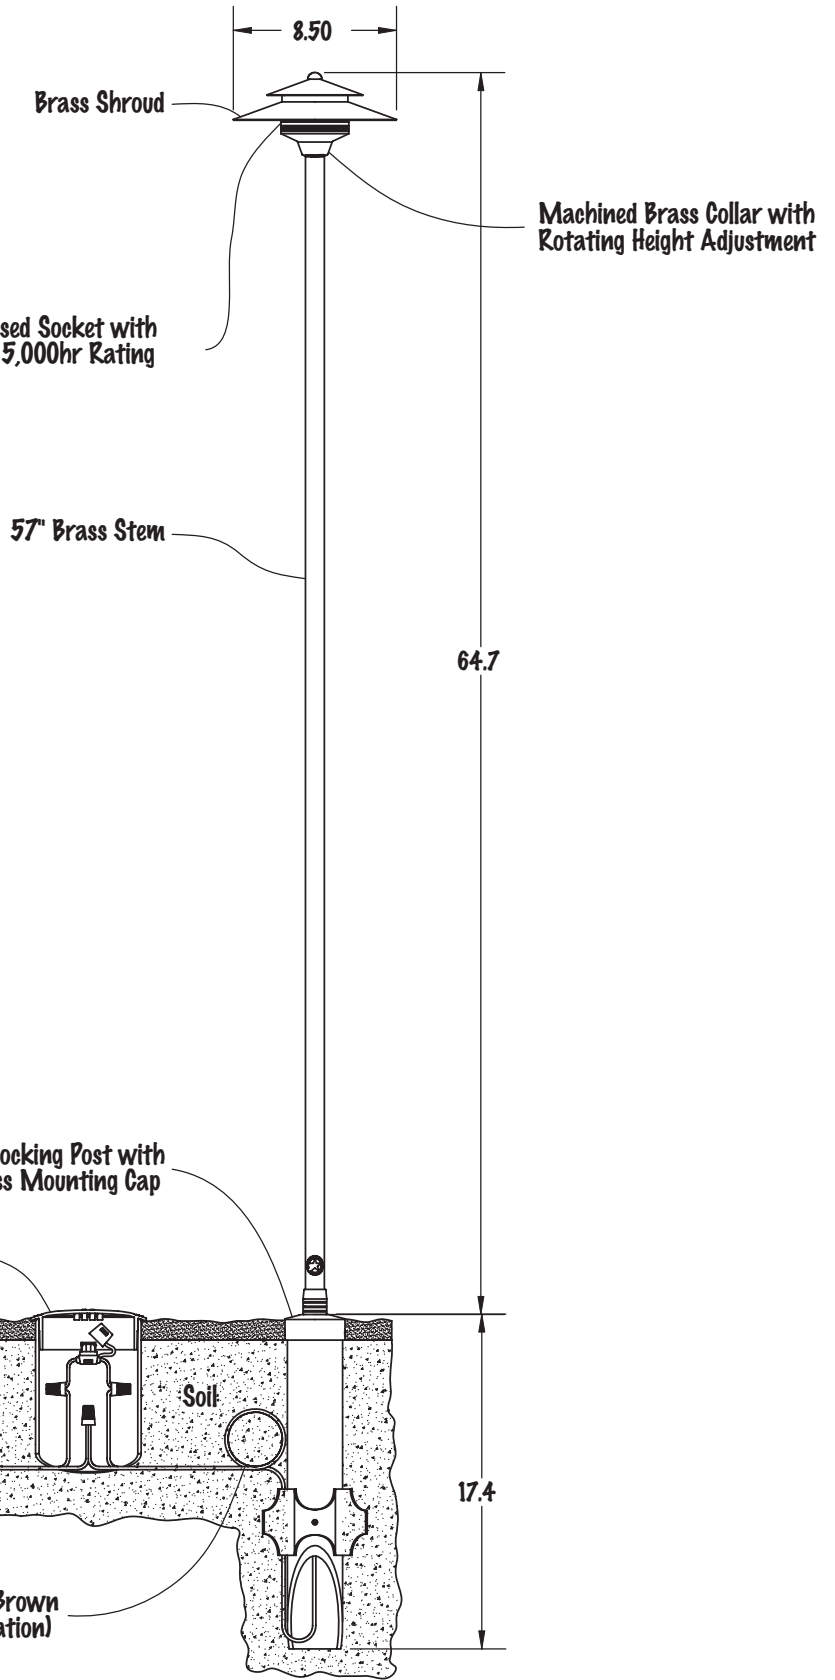

- NOTES:
- Lifetime Warranty
 - Maximum Wattage: 20 Watts
 - Included: Frosted Lens
 - Level of Light Application: 1, 2 & 3
 - Weathered Brass Finish

FIXTURE NAME

EXPEDITION

DESCRIPTION

BBQ/AREA LIGHT

REV

SCALE: NONE

WEIGHT: 6.0 lbs

11/29/07