



**Addendum to the Fixture Instruction Sheet**  
**A-770 062603**

1. Spread arms so that they are 120° apart.
2. Insert spacer so that each spacer stud goes through each fixture arm.
3. Secure with ball nut.
4. If the fixture is not hanging straight, adjust the arms so that they are 120° apart.

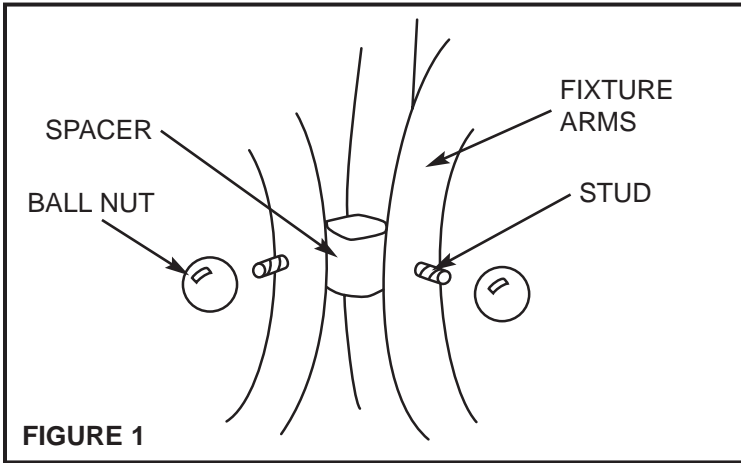


**Addendum to the Fixture Instruction Sheet**  
**A-770 062603**

1. Spread arms so that they are 120° apart.
2. Insert spacer so that each spacer stud goes through each fixture arm.
3. Secure with ball nut.
4. If the fixture is not hanging straight, adjust the arms so that they are 120° apart.

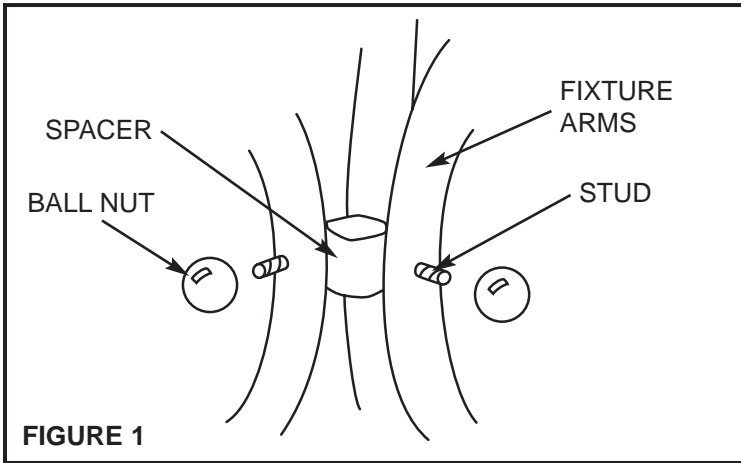

**Addendum to the Fixture Instruction Sheet**  
**A-770 062603**

1. Spread arms so that they are 120° apart.
2. Insert spacer so that each spacer stud goes through each fixture arm.
3. Secure with ball nut.
4. If the fixture is not hanging straight, adjust the arms so that they are 120° apart.

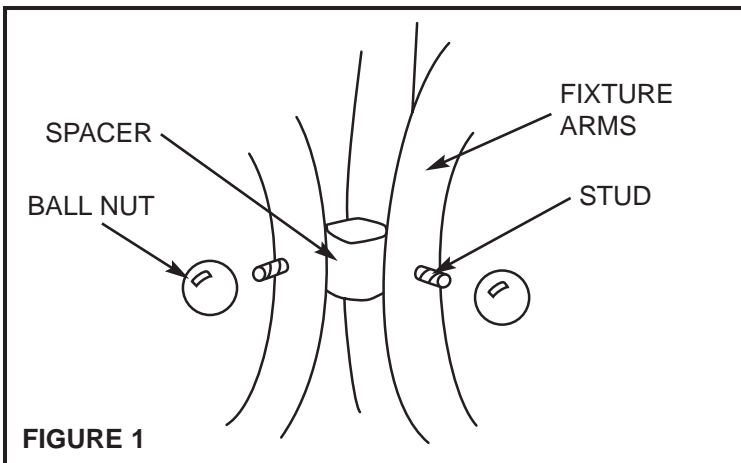

**Addendum to the Fixture Instruction Sheet**  
**A-770 062603**

1. Spread arms so that they are 120° apart.
2. Insert spacer so that each spacer stud goes through each fixture arm.
3. Secure with ball nut.
4. If the fixture is not hanging straight, adjust the arms so that they are 120° apart.