

**Models:**

(91235-147) Endeavour 12v

(91236-147) Endeavour 24v

**Description: 12V or 24V Solid Brass Directional Down Lights**

**Lamps Provided: Astro-Brite 20 Watt Bi-Pin - 20 Watt Max**

**ASSEMBLY/INSTALLATION INSTRUCTIONS:**

**Please read carefully before installing. Save these instructions.**

**TOOLS REQUIRED:** It is recommended that when installing any low voltage fixture that you have (at a minimum) the following items: voltage meter, amp probe, wire nuts, and assorted hand tools.

**Fixture Assembly Instructions**

1. Assemble fixture by threading lens onto collar and slip collar onto stem by pressing over the two o-rings until you feel it fully seat.
2. Determine fixture location. Attach the supplied Zero-G Docking Post until secure taking care not to twist the wire.
3. Find the point of connection (P.O.C) location and give yourself a 13-15' lead at P.O.C. Then work from P.O.C. back to the fixture location. (NOTE) While not necessary we recommend that you attempt to conceal all additional wire at the fixture rather than cutting off the excess. This helps maintain flexibility and even voltage.
4. **Lamping:** Grasp the collar and stem, using a twisting motion to separate the collar from stem. Re-lamp and reattach collar by pressing over the two o-rings until you feel them seat.

**Important safety and maintenance instructions**


1. Lamp is hot when lit! Do not touch when lamp is on!
2. Allow fixture to cool before touching or re-lamping fixture!
3. Keep away from materials, structures or landscapes that may burn!
4. Do not operate fixture if cover shield is damaged or missing.
5. Do not submerge fixture in water.
6. Clean fixture with mild soap. Do not use acid or any other solvent base cleaner.

**CAUTION: DO NOT OVERLOAD CABLE or TRANSFORMER** and maintain polarity at all times. For 12 volt systems, keep each fixture between 10.8 and 12 operating volts. For 24 volt systems, keep each fixture between 21.6 and 24.0 operating volts. Consult with a qualified electrical contractor and local electrical codes before installing any electrical product.

# UNIQUE LIGHTSCAPING™

a brand of Sea Gull Lighting

Beryllium Copper Pre-Greased Socket with 20 Watt Astro-Brite, 5,000hr Rating

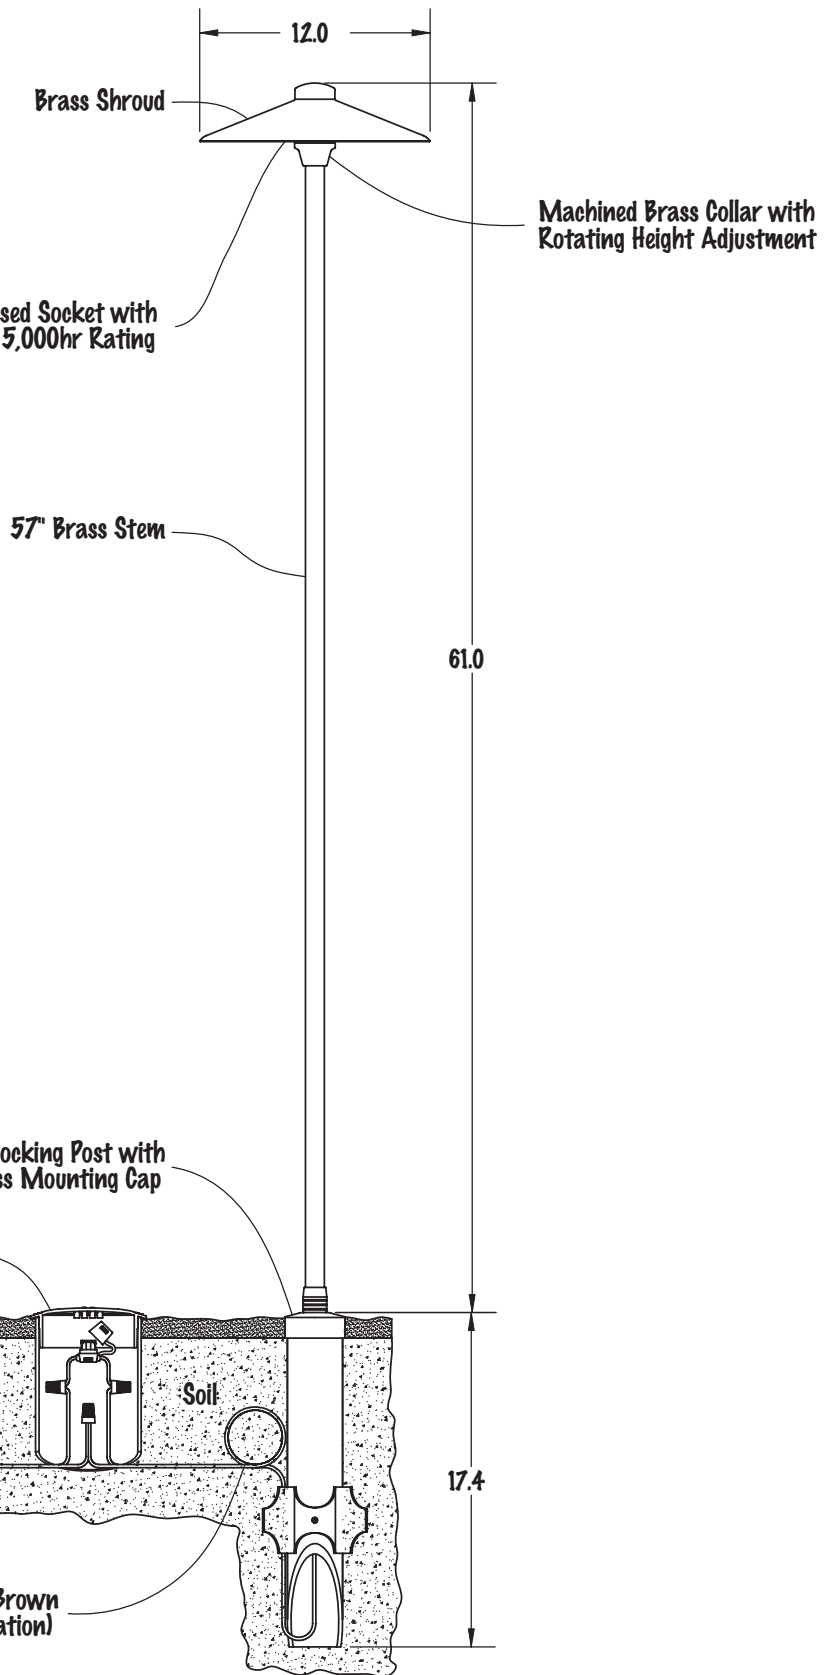

Zero & Docking Post with Solid Brass Mounting Cap

Galaxy Hub (Not Included)

Soil

25 Feet, 18/2 THW UV Brown (Bury Extra Wire at Fixture Location)

- NOTES:
- Lifetime Warranty
  - Maximum Wattage: 35 Watts
  - Included: Frosted Lens
  - Level of Light Application: 1, 2 & 3
  - Weathered Brass Finish

FIXTURE NAME

**ENDEAVOUR**

DESCRIPTION

**BBQ AREA LIGHT**

SCALE: NONE

WEIGHT: 7.7 lbs

REV

3/2/09