


# INSTALLATION AND SAFETY INSTRUCTIONS

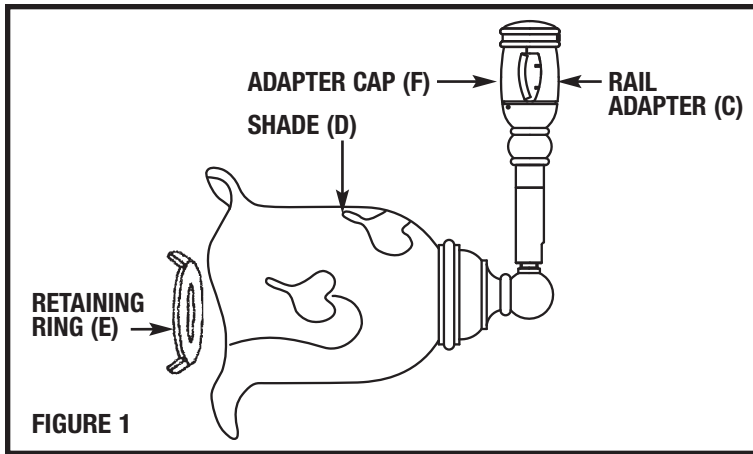


## INSTALLATION

1. Unthread adapter cap (F) from rail adapter (C).
2. Place shade (D) over socket and thread retaining ring (E) onto socket.
2. Making sure contacts (A) will align with conductors (B) on rail, set the bottom of the rail adapter (C) to the bottom of the rail and "roll" rail adapter (C) up onto the rail.
3. Close hinged side of rail adapter (C) up onto rail and thread cap back onto rail adapter (C).
4. Install lamp. Thread supplied lamp enclosure over lamp.

## IMPORTANT SAFETY INSTRUCTIONS

- Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.
- For use with the 120V Transitions rail series by Sea Gull Lighting.
- Use of other manufacturers components will void warranty, listing, and create a potential safety hazard.
- If you are unclear as to how to proceed, contact a qualified electrician.
- Minimum distance from the front of the lamp to combustible surfaces is 8".
- Make sure all connections are tight.
- Dimming halogen lamps greatly reduces lamp life.
- Turn off and allow to cool before replacing lamp.
- Lamp gets **HOT** quickly! Contact switch only when turning on.
- Do not touch hot lens, guard, or enclosure.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.
- Save these instructions.

## FIXTURE INSTALLATION

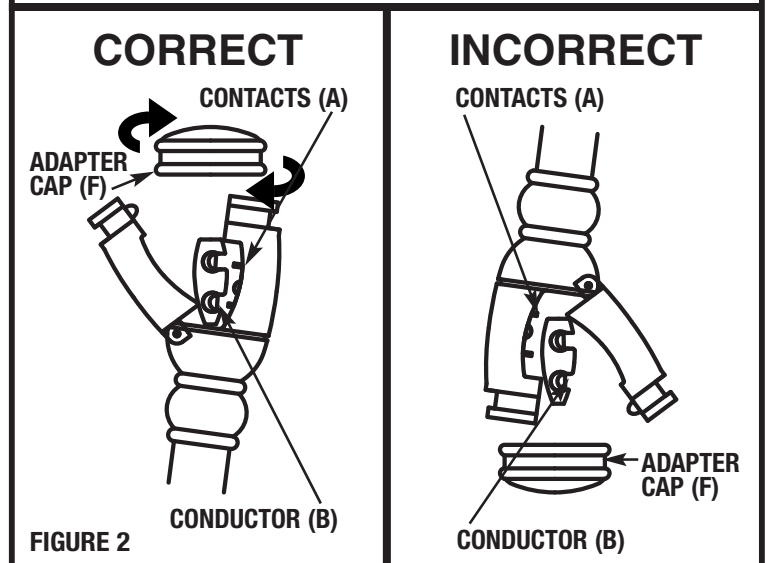

AMBIANCE<sup>®</sup>  
LIGHTING SYSTEMS

**LR-156**

010808

[www.SeaGullLighting.com](http://www.SeaGullLighting.com)