



## DUNNING 1, 2, 3 & 4 LIGHT WALL

4413301; 4413302; 4413303; 4413303

### General Product Information



### Tools Required



### Safety Information

#### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

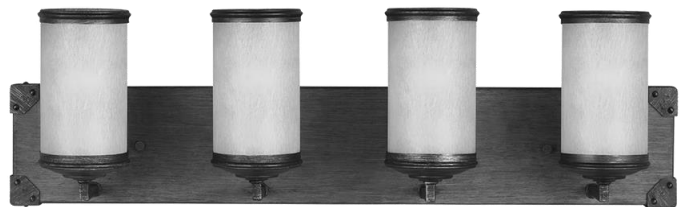

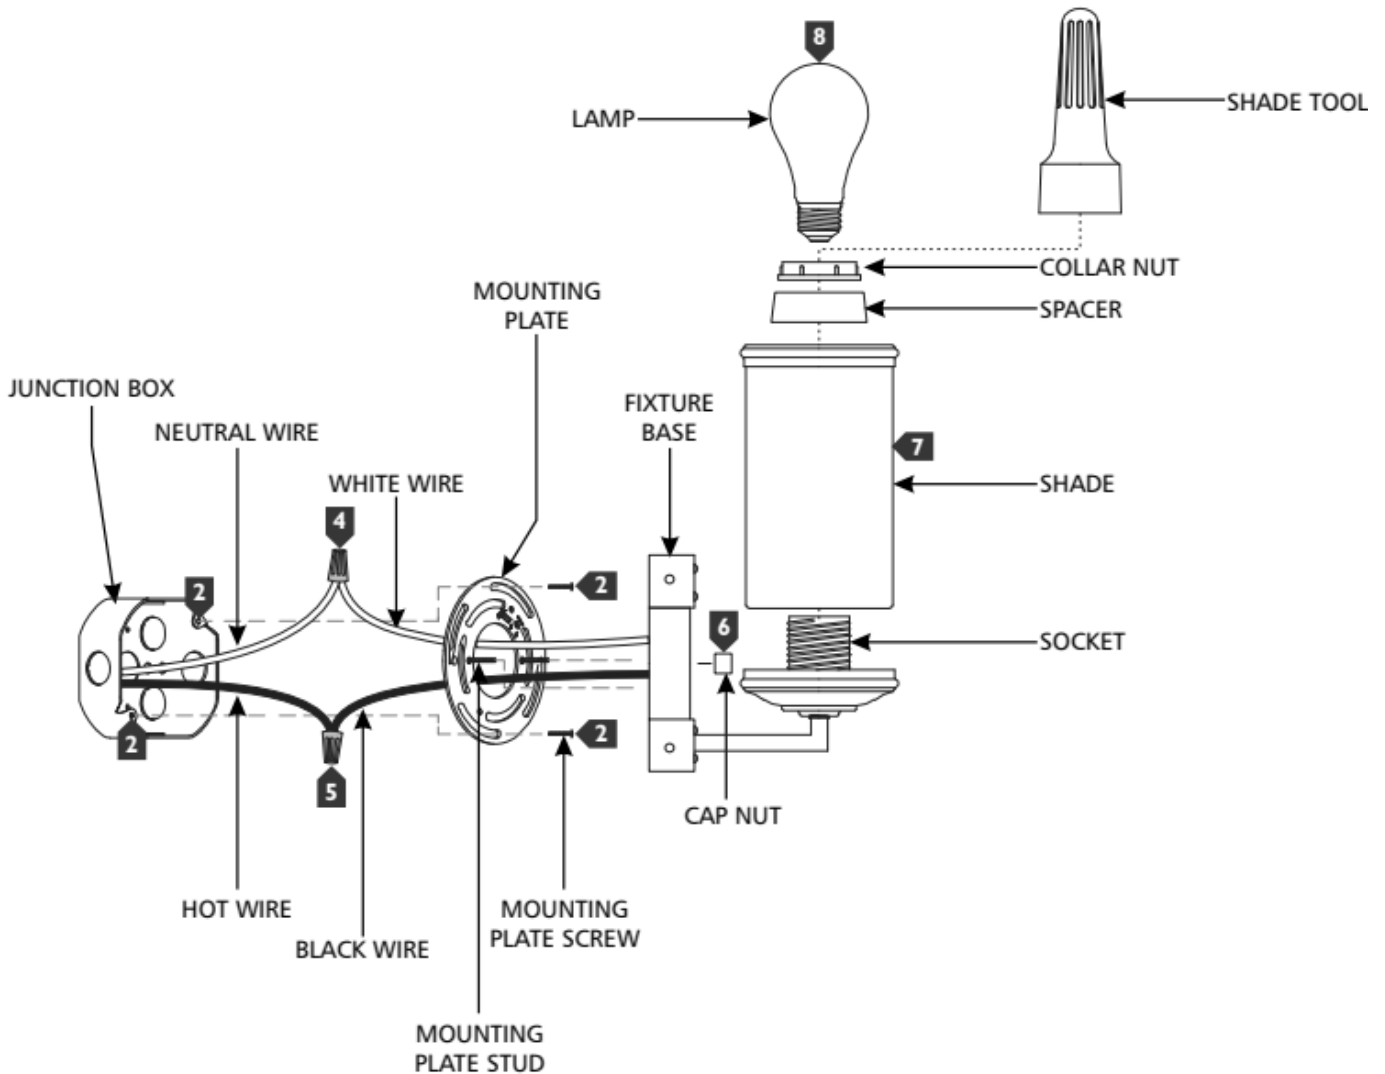

## INSTRUCTIONS

### I. Preparing the Fixture

1. **For 3 & 4 light fixtures:** Secure the mounting plate to the wall using the anchors and anchor screws provided.
2. Secure the mounting plate to the junction box with two mounting plate screws.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire
4. Mount the fixture base onto the mounting plate studs and secure it in place by installing the cap nuts.

5. Place the shade and spacer onto the socket and secure them in place by screwing the shade collar nut onto the socket using the shade tool; repeat for remaining shades.
6. Screw the lamp(s) into the socket(s).