


A. Mounting Plate <i>Plaque de Montage</i> Placa de Montaje	E. Cage <i>Cage</i> Armazón	#8-32UNC 5/8" Outlet Box Screws* <i>Vis Boîte De Prise De Courant</i> #8-32UNC 5/8"*	*not included non fourni no incluido
B. Fixture Mounting Screws <i>Vis de Montage</i> Tornillos para Montar	F. Green Grounding Screw <i>Vis Verte Fil de Terre</i> Tornillo de Tierra Verde	Tornillos De La Caja De Salida #8-32UNC 5/8"*	
C. Canopy <i>Verrière</i> Cubierta	Ground Wire* <i>Câble de Terre*</i> Cable de Suministro*		
D. Glass <i>Verre</i> Vidrio	Outlet Box* <i>Boîte de Prise de Courant*</i> Caja de Salida		

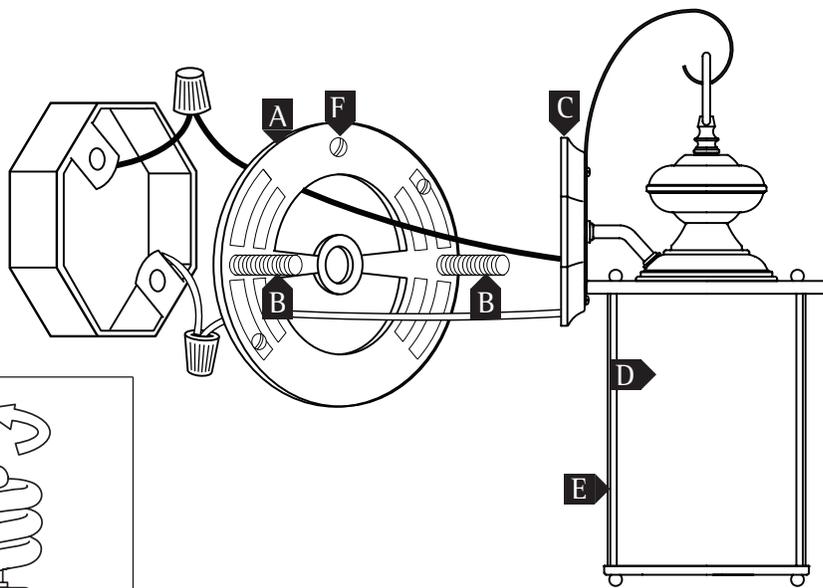


Fixtures With A One Piece Lamp / Ballast Combination

Luminaire Combinaison Lampe / Ballast

Accesorios con una Combinación de Lámpara de Una Pieza/ Balasto Electrónico

G. Self Ballasted Lamp <i>Lampe A Ballast Intégré</i> Lámpara con Propio Balasto Electrónico	H. Socket <i>Douille</i> Casquillo
---	--

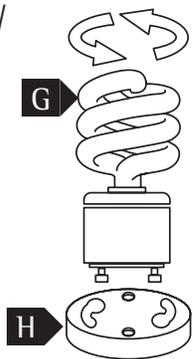

Hg Mark means lamp contains mercury. Follow disposal laws. See www.lamprecycle.org

Le marquage indique que la lampe contient du mercure. Respecter les lois concernant l'élimination des déchets. Veuillez consulter le site www.lamprecycle.org

La marca significa que la lámpara contiene mercurio. Siga las leyes de desecho. Vea www.lamprecycle.org.

Helpful Tools / Outils Utiles / Herramientas Útiles



IMPORTANT SAFETY INSTRUCTIONS

- Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.
- Use of other manufacturers components will void warranty, listing and create a potential safety hazard.
- If you are unclear as to how to proceed, contact a qualified electrician.
- You don't need special tools to install this fixture.
- Be sure to follow the steps in the order given.
- Proper wiring is essential for the safe operation of this fixture.
- CAUTION: Fixtures with photo-cells should be mounted at least 48" from all sides to avoid reflection of light back onto Photo-cell, causing the Photo-cell to malfunction or flicker.
- Read instructions carefully.

SAVE THESE INSTRUCTIONS

NOTE: This glass is handcrafted, the slight imperfections in the glass add to the authenticity of the fixture.

Before You Begin

Carefully remove the fixture from the carton and check that all parts are included, as shown in figure 1. Be careful not to misplace any of the screws or parts which are needed to install this fixture.

Wet Location

NOTE: For fixtures labeled for wet location and used outdoors.

CAUTION: To reduce the risk of electrical shock, provide a watertight seal between the fixture and the mounting surface by using a silicone or similar caulking.

Installation

Important: do not attach fixture directly to outlet box.

1. Insert fixture mounting screws (B) in threaded holes of universal mounting plate (A). Run fixture mounting screws (B) all the way down to the heads.
2. Place universal mounting plate (A) against outlet box (not supplied) and secure in place using #8-32UNC 5/8" outlet box screws (not supplied). Be sure the mounting screws (B) are perfectly horizontal so fixture hangs straight.
3. A. Use one of the supplied orange wirenuts to connect the fixture hot wire (black wire, or round and smooth tracer) to the supply hot wire.
B. Use one of the supplied orange wirenuts to connect the fixture common wire (white wire, or square and rigid) to the supply common wire.
C. Gently try to remove the wires from the connector. If you can remove the wires, carefully re-do the wiring connection.
4. **Grounding Instructions:** Connect the supply ground wire (green or bare conductor) and fixture ground wire (green or bare conductor) using the remaining orange wire nut. Gently pull on the ground wires to confirm a secure connection. If either conductor is loose remove the wire nut and reconnect the wires.

Final Assembly

Make sure no bare wires can be seen outside wire connectors. Note: if glass panels are not installed, please follow this step: place bottom edge of glass into channel. Bend tabs over edge to secure in place.

1. After wires are connected, tuck them carefully inside outlet box. Position backplate (C) over mounting screws (B) and secure in place by threading cap nuts onto mounting screws (B).
2. Install self ballasted lamp (G) by gently twisting into socket (H).