

# GENERATION LIGHTING



## MAYA X-LARGE LINEAR CHANDELIER

GLC1226

### General Product Information



Intertek



Product Warranty



FCC Statement

### Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER



PENCIL/MARKER

### Safety Information

#### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

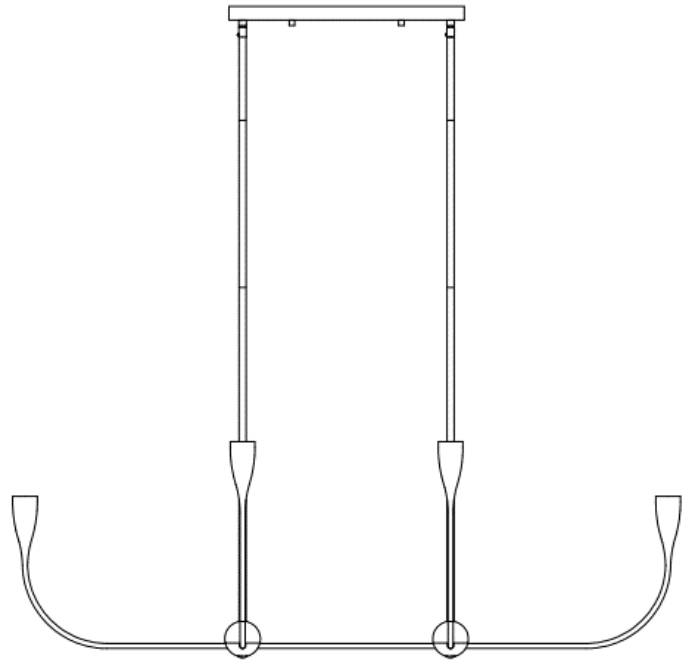

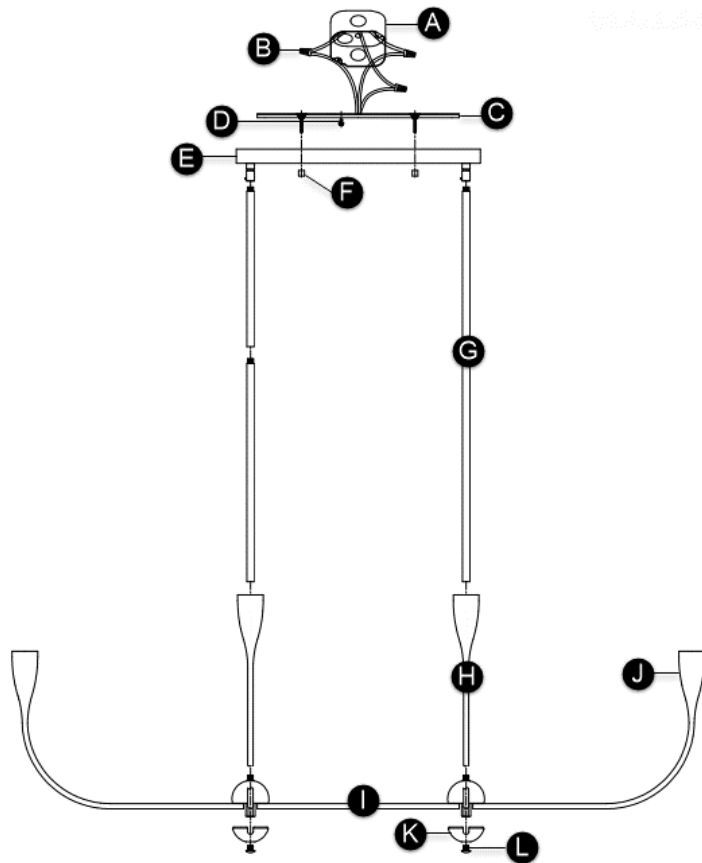

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate with Mounting Studs
- D. Ground Screw
- E. Canopy with Swivels
- F. Cap Nuts
- G. Stem Assemblies
- H. Fixture Arms
- I. Fixture
- J. Fixture Arms with Socket Assembly (Not Illustrated)
- K. Decorative Covers
- L. Cap Screws
- M. Bulbs (Not Included/Not Illustrated)
- N. Anchors & Anchor Screws (Not Illustrated)

## INSTRUCTIONS

### I. Preparing the Fixture

1. Separate the mounting plate from the canopy and use the mounting plate to trace and mark the locations for the anchors.
2. Drill a hole at the marked locations to fit the anchors into before drilling them in.
3. Install the mounting plate over the junction box using the mounting screws. Then further secure it by drilling the anchor screws into the anchors.
4. Determine the desired height of the fixture and complete the stem assemblies of equal length for each side of the fixture by screwing the stems together.
5. Feed the fixture wires through one of the stem assemblies.
6. Then screw both stem assemblies on top of the fixture and spread the folded arms of the fixture evenly.
7. Using the cap screws, attach the decorative covers to the bottoms of the fixture.
8. Remove the hex nut from the canopy and remove the swivel joints and install the swivel joints on the top of both stem assemblies.
9. Install the canopy and reinforcement plate on the top of the swivel joints. Then tighten the hex nut.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black/smooth) and hot power line wire
  - b) Neutral fixture wire (white/textured or ribbed) and neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

### III. Installing the Fixture

1. Lift the assembled fixture and align the holes in the canopy with the mounting studs on the mounting plate and push upwards so that they poke through the holes in the canopy.
2. Secure the canopy to the mounting plate by screwing the cap nuts on the mounting studs.
3. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.