

## LINTON MEDIUM LANTERN

GLO1391


## General Product Information



Intertek

SAVE THESE  
INSTRUCTIONS!STANDARD  
INSTALLATION

OUTDOOR

WET LOCATION  
SAFENEC COMPLIANT  
JUNCTION BOXBULB(S)  
(NOT INCLUDED)

CONVERTS TO LED

INSTALL IN  
ADHERENCE WITH  
LOCAL ELECTRICAL  
CODESPLEASE SEE  
visualcomfort.com  
FOR PRODUCT  
SPECSBEST PRACTICE:  
HANDLE FIXTURE  
WITH GLOVESCLEAN WITH SOFT,  
DRY CLOTH ONLY. NO  
HARSH CHEMICALS!

Product Warranty



FCC Statement

## Suggested/Required Tools



ELECTRIC DRILL

PHILLIPS-HEAD  
SCREWDRIVER

WIRE CUTTER



CAULK GUN

## Safety Information

## CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

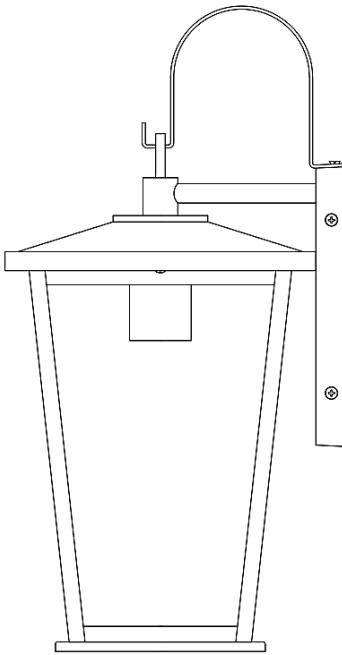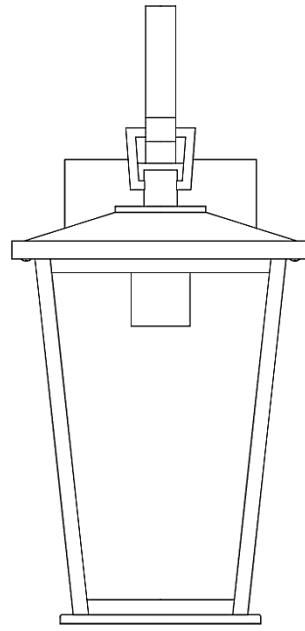

## Fixture Parts

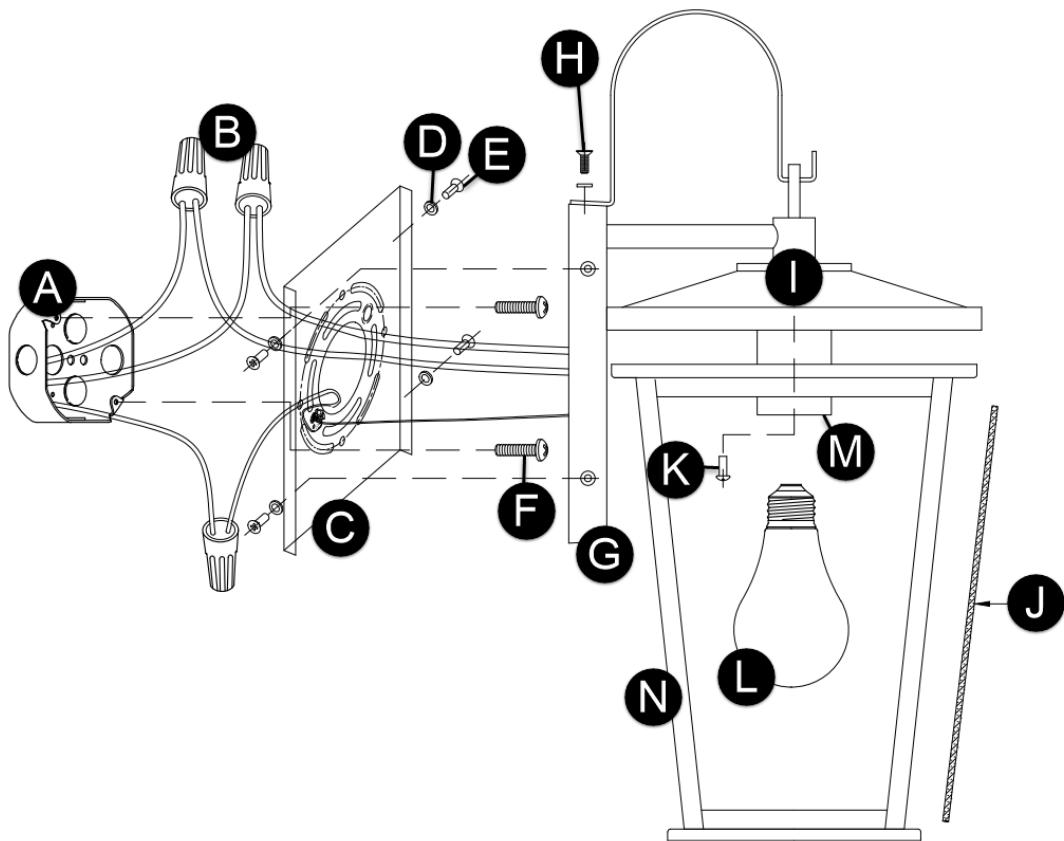

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Washers
- E. Fixture Screws
- F. Mounting Screws
- G. Fixture Base/Backplate
- H. Fixture Arm Screw with Washer
- I. Fixture
- J. Glass Shade Inserts
- K. Frame Screw
- L. Bulb (Not Included)
- M. Socket
- N. Fixture Frame

## INSTRUCTIONS

### I. Preparing the Fixture

1. Separate the mounting plate from the fixture base.
2. Install the mounting plate to the junction box and secure it using the mounting screws.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire to hot power line wire
  - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Secure the fixture base to the mounting plate with the fixture screws and washers.
2. Secure the fixture arm to the fixture base with the fixture arm screw and washer.
3. Install the glass shade inserts to the fixture frame and secure them with the tabs.
4. Install the fixture frame onto the fixture top with the frame screws.
5. Screw the bulb into the socket assembly to complete installation. Refer to the socket label for max wattage information.
6. For wet locations, caulk around the base of the fixture with a waterproof construction sealant.