

IMPORTANT SAFETY INSTRUCTIONS

CAUTION—Turn off main power at the circuit breaker before installing the fixture, in order to prevent electric shock.

- If you are unclear how to proceed, contact a qualified electrician.
- Read instructions carefully.
- Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.
- Use of other manufacturers components will void warranty, listing and create a potential safety hazard.
- You don't need special tools to install this fixture.
- Be sure to follow the steps in the order given.
- Save these instructions.

NOTE: This unit can be dimmed. We recommend using a Lutron "Skylark" SELVB-300PH_WH or a Leviton 300w "Decora" No 6615-POW.

NOTE: When properly installed to a junction box, there will be a 1/8" gap between the ceiling and the edge of the trim ring. Be sure to keep this air space, it is essential for the proper functioning of the fixture.

NOTE: There are no serviceable parts in this fixture. Do not disassemble.

CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. Parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.

If different finish trim is desired for your surface mounted fixture, you may order a Sea Gull Lighting #14500s-xxx from any Sea Gull Lighting distributor.


SURFACE MOUNTING INSTALLATION

STEP 1:

- Use a listed wire connector to connect the fixture hot wire (black wire, or round and smooth tracer) to the supply hot wire.
- Use a listed wire connector to connect the fixture common wire (white wire, or square and rigid) to the supply common wire.
- Gently try to remove the wires from the connector. If you can remove the wires, carefully re-do the wiring connection.

STEP 2:

GROUNDING INSTRUCTIONS: The green grounding screw is to be inserted into the hole with two raised dimples provided on the mounting plate (A). Wrap the ground wire from the outlet box (bare metal or green insulated wire) around the green grounding screw on the mounting plate (A) Tighten the green grounding screw to secure the ground connection. **NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.**

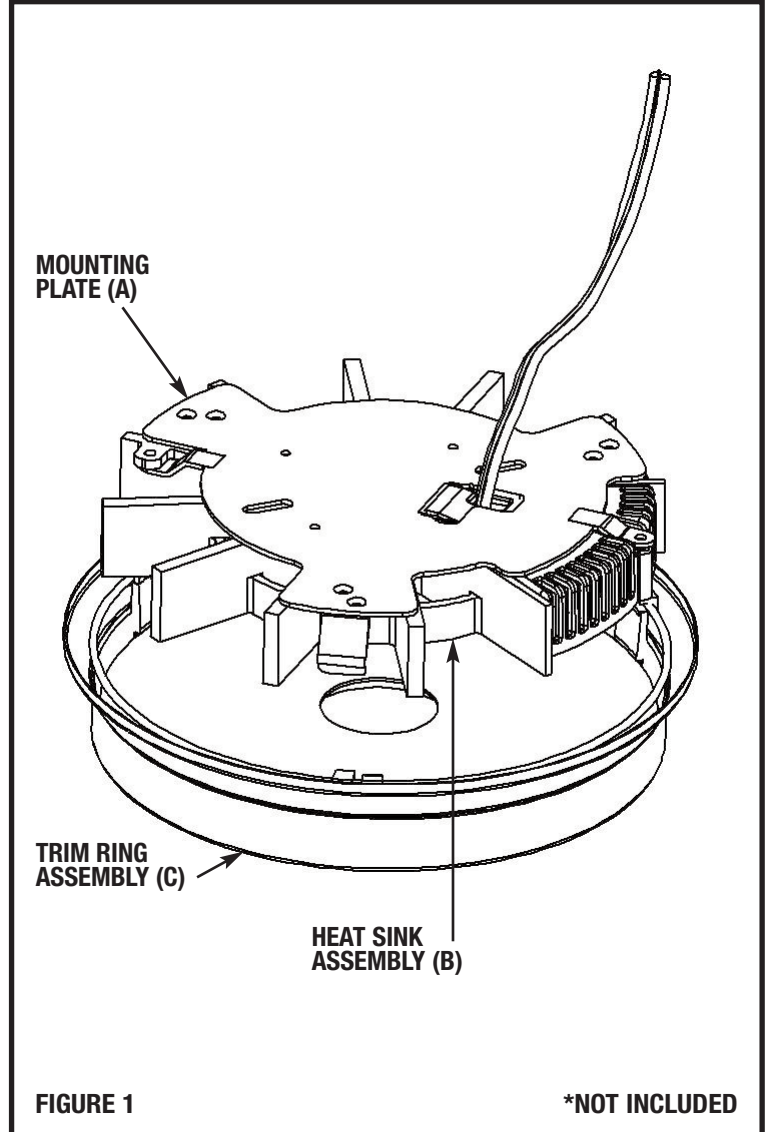

FINAL ASSEMBLY

Make sure no bare wires can be seen outside wire connectors.

STEP 3:

After wires are connected, tuck them carefully inside outlet box and then raise the heat sink assembly (B) against ceiling.

STEP 4:

Secure mounting plate (A) to outlet box with outlet box screws (not supplied).

STEP 5:

Raise trim ring assembly (C) making sure it properly snaps onto the heat sink assembly (B).

STEP 6:

Turn power on.