

OSLO 3, 5, & 9 LIGHT CHANDELIERS

31160; 31170; 31161; 31171; 31162; 31172

General Product Information



Intertek

SAVE THESE
INSTRUCTIONS!STANDARD
INSTALLATION


INDOOR



DRY LOCATION

NEC COMPLIANT
JUNCTION BOXBULB(S)
(NOT INCLUDED)

CONVERTS TO LED

PLEASE SEE
visualcomfort.com
FOR PRODUCT
SPECSCLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALSBEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES

Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL

PHILLIPS-HEAD
SCREWDRIVER

PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



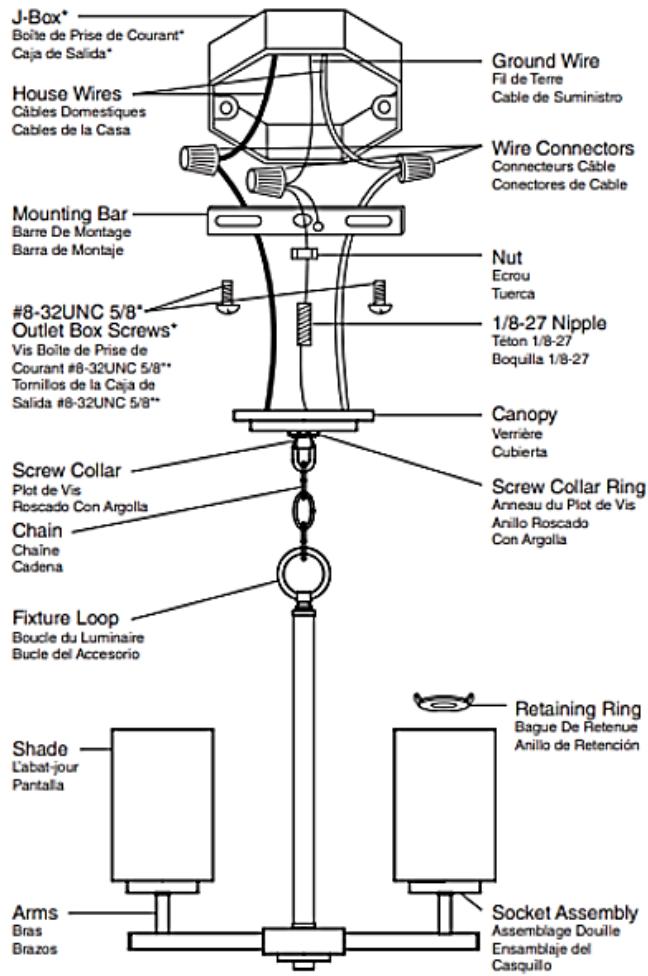

INSTRUCTIONS

I. Preparing the Fixture

1. Rotate arms.
2. Secure mounting bar to outlet box with outlet box screws. Thread nipple to mounting bar so that 5 threads are exposed above the mounting bar. Secure with nut. Thread screw collar to nipple.
3. Gently apply tension to fixture wires and thread fixture loop to fixture.
4. Using 2 pairs of pliers or chain breaks, open one link of chain and connect it to the fixture loop at the top of the fixture. Do not twist.
5. Slide the screw collar ring and canopy, in that order, over the chain. Open one link on the other end of the chain and attach it to the screw collar which has been mounted to the nipple. Be sure to close all chain links completely.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Raise canopy against ceiling and thread screw collar ring to screw collar.
3. Place glass around the socket and secure by threading the retaining ring onto socket.
4. Install lamps to complete installation.