



ROBIE 9 & 12 LIGHT CHANDELIERS

3121609; 3121612

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

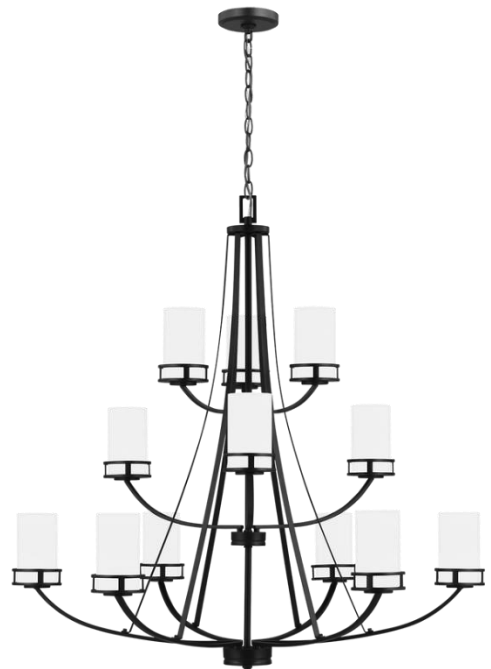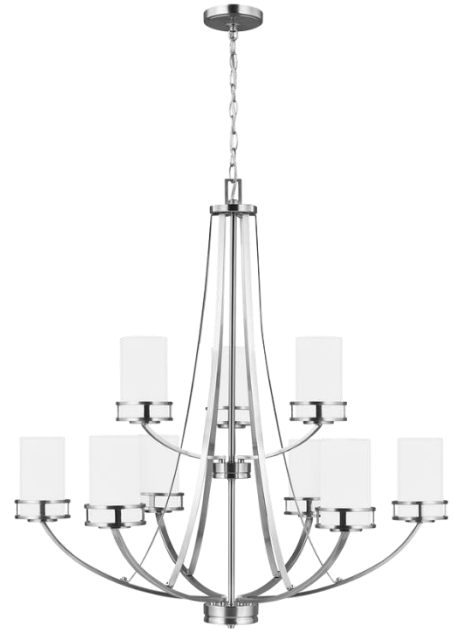


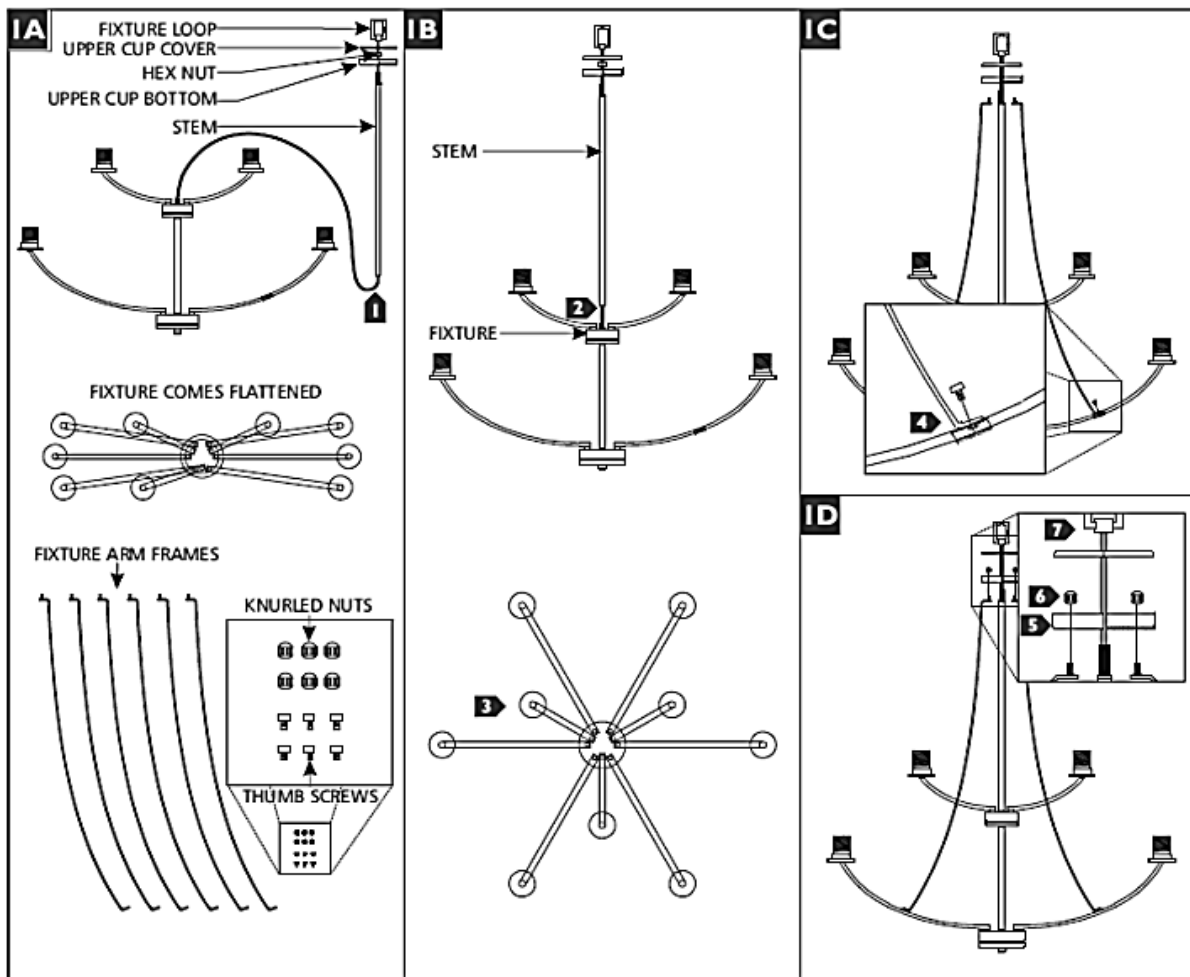

INSTRUCTIONS

I. Assembling the Fixture

1. As shown in figure 1A, feed the cord from the fixture through the stem, upper cup, hex nut, upper cup cover, and fixture loop in that order.
2. As shows in figure 1B, screw the stem to the top of the fixture.
3. Gently straighten the fixture arms from the flattened position.
4. Place each of the fixture arm frames onto the bottom fixture arms and secure with a thumb screw at the location shown in figure 1C.
5. Slide the upper cup over the stem and fixture arm frames and secure them in place with the hex nut.
6. Use a knurled nut to secure each fixture arm frame to the upper cup.
7. Slide the upper cup cover and fixture loop over the stem and screw the fixture loop into place to secure it.

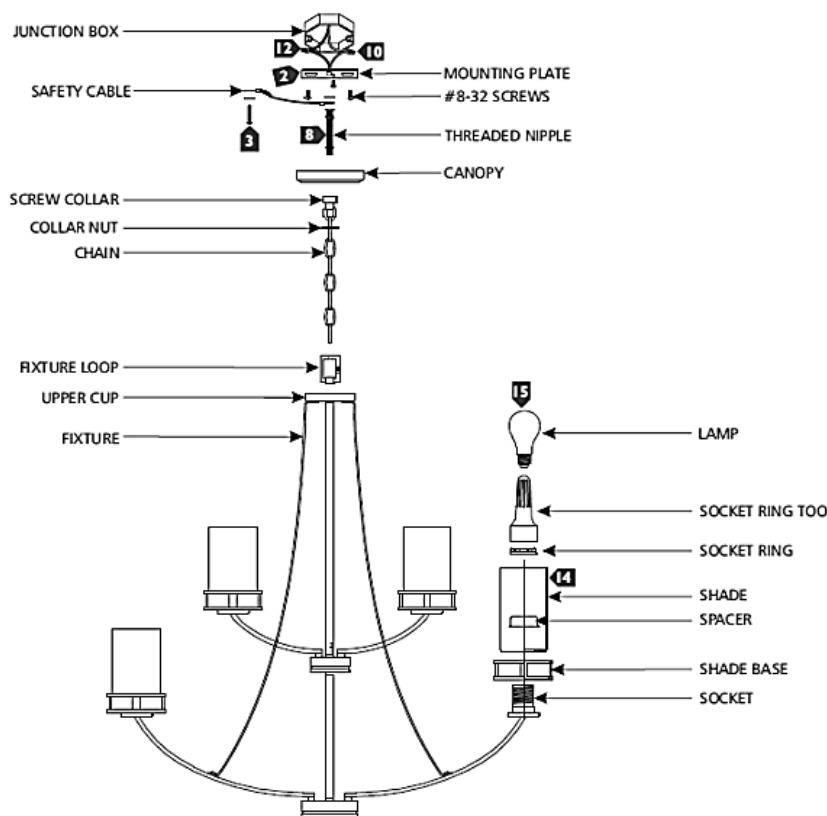

II. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Secure the safety cable to a secure solid structure in accordance with local building code.
4. Feed the cord from the fixture through the upper cap and fixture loop assembly and screw them together.
5. Determine the desired height of the fixture and remove a portion of the chain by opening a link with pliers.
6. Open the chain link with pliers and install the chain onto the fixture loop. Close the chain link.
7. Unscrew the collar nut from the screw collar. Install the collar nut and the canopy onto the chain.
8. Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture. Close the link.
9. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

III. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

IV. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Place the shade base, shade and spacer over the socket and secure in place with the socket ring using the socket ring tool.
3. Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.