






## METCALF 1, 2, 3 & 4 LIGHT WALL

4413201, 4413202, 4413203, 4413204

### General Product Information



WARRANTY



FCC STATEMENT

### Tools Required



### Safety Information

#### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



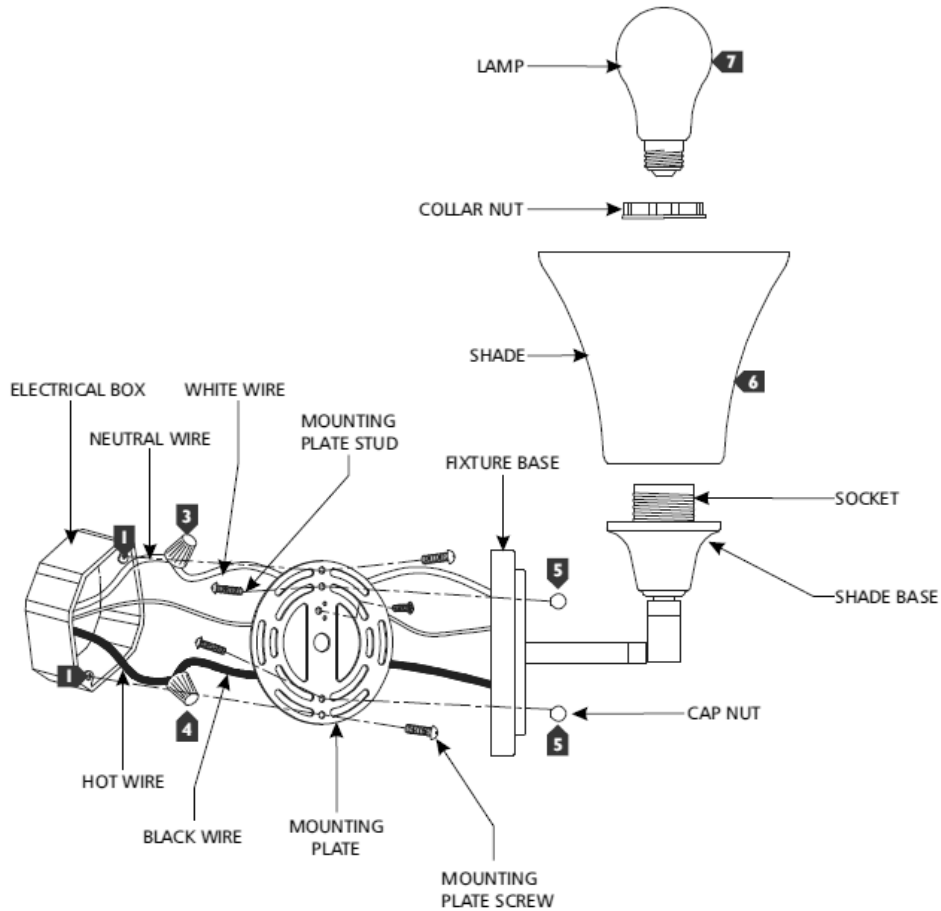

## INSTRUCTIONS

### I. Preparing the Fixture

1. Secure the mounting plate to the electrical box with two mounting plate screws. **For single light fixture, mounting plate studs must face horizontally.**

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire
4. Align the fixture base onto the mounting plate. Secure it with the two cap nuts.
5. Install the shade by properly placing it over the socket and screwing the collar nut tightly onto the socket.
6. Screw the lamp into the socket.
7. Repeat steps 6-8 for remaining sockets if necessary.