

HOLMAN 2, 3 & 4 LIGHT WALL

44806, 44807, 44808

General Product Information



Tools Required



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.
Install and use this product in adherence with local electrical codes and regulations.



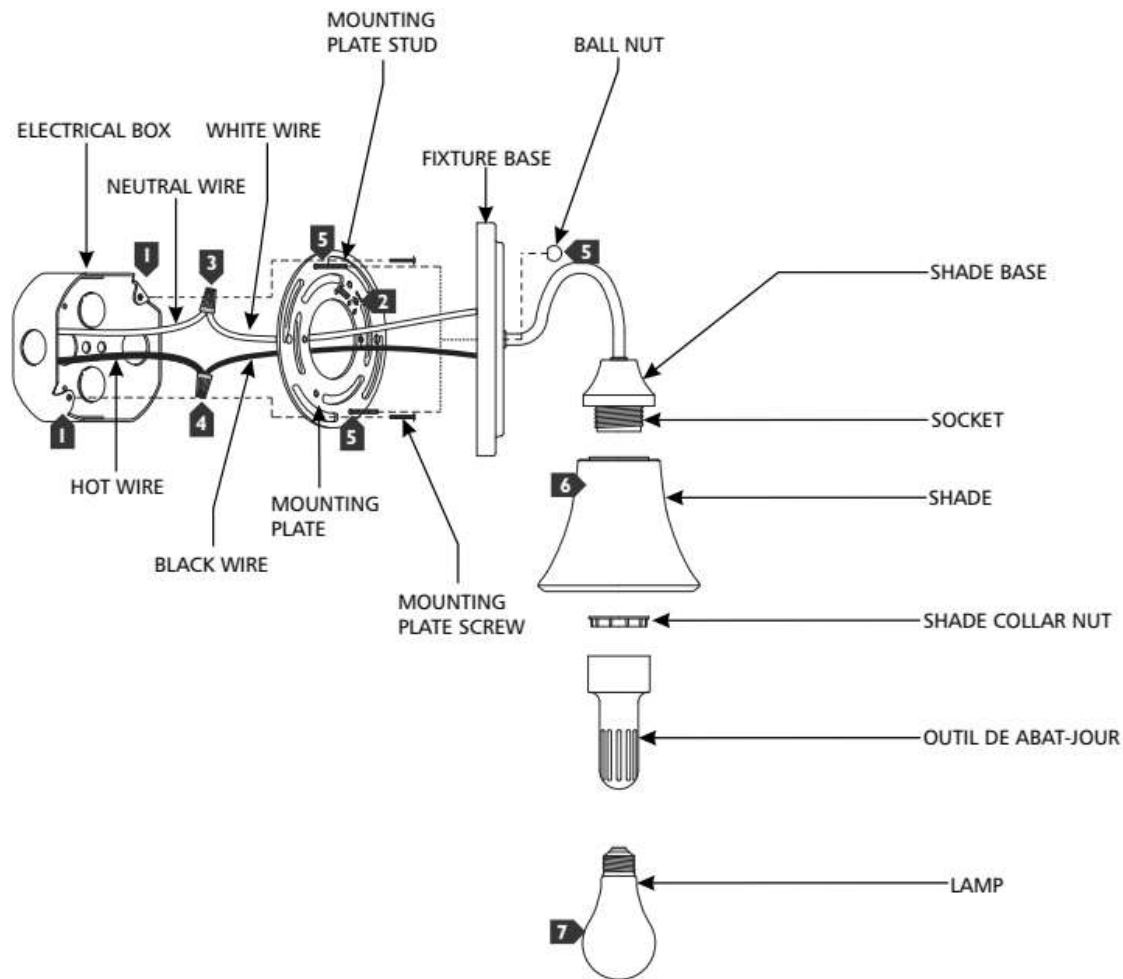

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the electrical box with two mounting plate screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Align then place the fixture base onto the mounting plate studs and secure it with the two ball nuts.
5. Place the shade onto the shade base and secure them in place by installing and tightly screwing the shade collar nut onto the socket using the shade tool.
6. Screw the lamp into the socket.
7. If necessary, repeat steps 6 and 7 for the remaining shade.