





ROME SMALL 3-LIGHT, MEDIUM 6-LIGHT, & LARGE 8-LIGHT LANTERNS

5134903; 5134906; 5134908

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

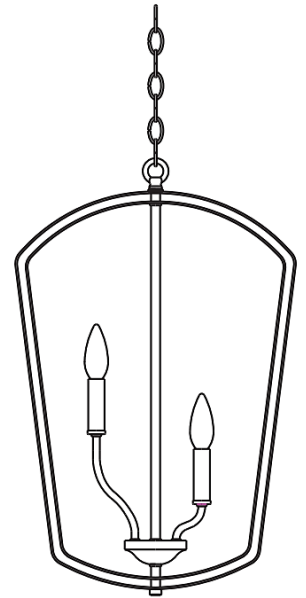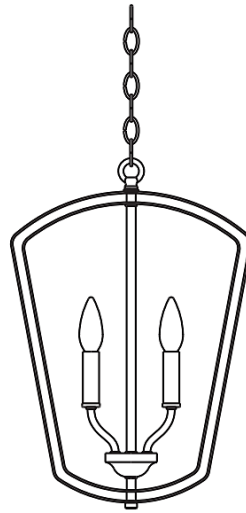

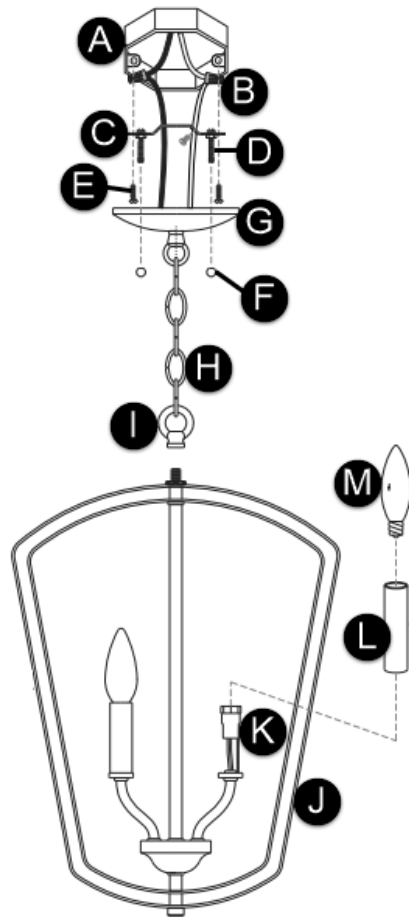

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Studs
- E. Mounting Screws
- F. Cap Nuts
- G. Canopy & Canopy Loop
- H. Chain
- I. Fixture Loop
- J. Fixture Frame
- K. Sockets
- L. Candle Tubes
- M. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box.
2. Install the candle tubes by sliding them over the sockets.
3. Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.
4. Determine the desired fixture height and remove a portion of the chain from the bottom by opening a link with pliers.
5. Feed the fixture cord through the fixture loop, then screw the fixture loop onto the fixture.
6. Open the chain link with pliers and install the chain on the fixture loop. Close the chain link.
7. Weave the cord through the chain, canopy, and out of the electrical box. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Align, then place the fixture onto the mounting plate studs and secure it with the two provided cap nuts.