










WEBSTER ONE LIGHT FLUSH MOUNT

5326


General Product Information

 <p>ETL LISTED Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>STANDARD INSTALLATION</p>	 <p>INDOOR</p>
 <p>DAMP LOCATION SAFE</p>	 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>BULB(S) (NOT INCLUDED)</p>	 <p>TITLE 24 COMPLIANT</p>
 <p>LED</p>	 <p>PLEASE SEE VisualComfort.com FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p>	 <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p>


WARRANTY


FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



- A. Mounting Bar
Barre de Montage
 - B. Canopy
Verrière
 - C. Diffuser
Diffuseur
 - D. Green Grounding Screw
Vis Verte Fil de Terre
 - E. Fixture Mounting Screws
Vis de Montage
 - F. Keyslots
Fentes
 - G. Retaining Screws
Vis de Retenue
- Outlet Box*
*Boîte de Prise de Courant**
- Wire Connectors*
*Connecteurs Câble**
- Outlet Box Screws*
*Vis Boîte de Prise de Courant**

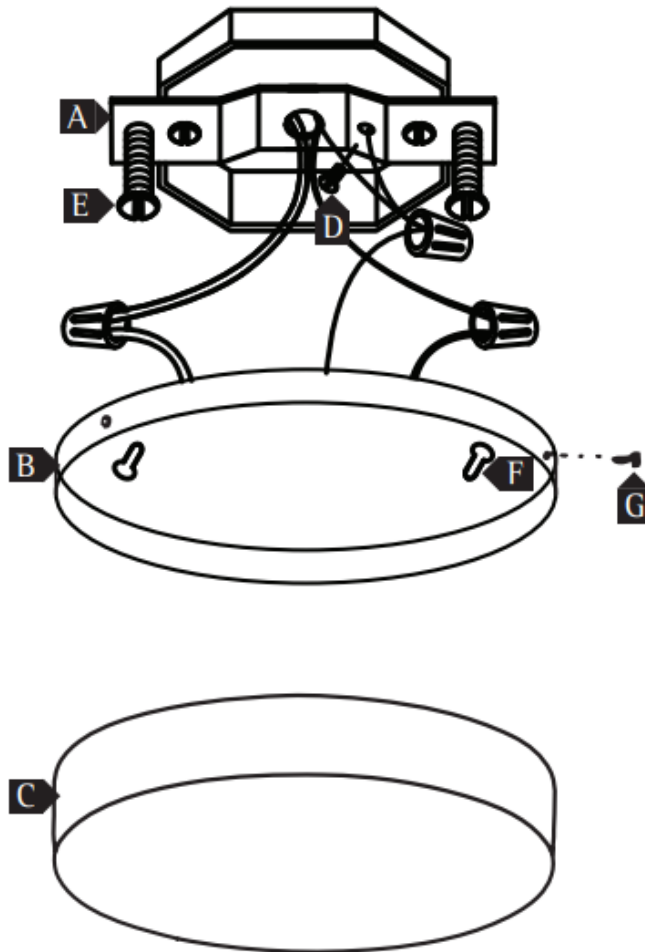

INSTRUCTIONS

I. Preparing the Fixture

1. Secure mounting bar to outlet box with outlet box screws.
2. Thread fixture mounting screws into threaded holes of mounting bar 3 turns each.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire

III. Installing the Fixture

1. After wires are connected, tuck them carefully inside outlet box. Raise the canopy to the ceiling to allow for mounting screws to protrude through keyslots. Rotate canopy clockwise until mounting screws are in narrow part of keyslot. Tighten mounting screws with screwdriver.
2. Install lamp.
3. Attach diffuser and secure in place with diffuser retaining screws.