


OSLO ONE LIGHT MINI-PENDANTS

61160; 61170

General Product Information



Product Warranty



FCC Statement

Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

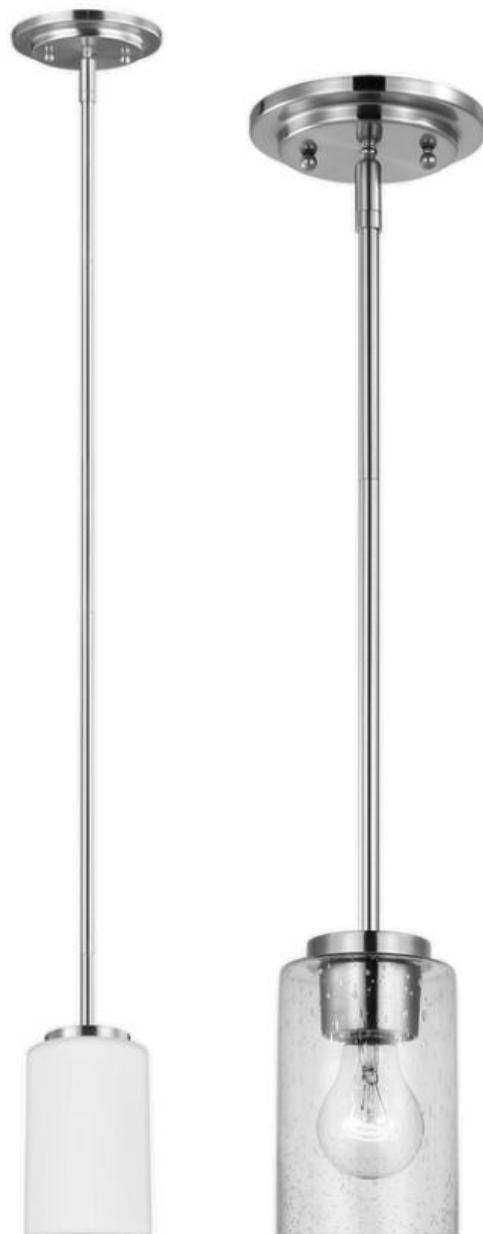

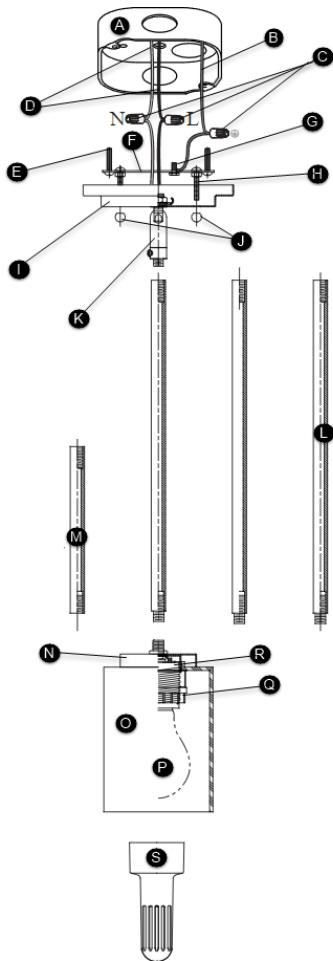

Fixture Parts

- A. Junction Box
- B. Ground Wire
- C. Wire Connectors
- D. Supply Wires
- E. Mounting Screws
- F. Mounting Plate
- G. Ground Screw
- H. Mounting Studs
- I. Canopy
- J. Cap Nuts
- K. Swivel Joint
- L. 12" Stem Assembly
- M. 6" Top or Bottom Stem
- N. Shade Base
- O. Shade
- P. Bulb (Not Included)
- Q. Retaining Ring
- R. Glass Holder
- S. Retaining-Ring Tool (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the canopy, unscrewing the cap nuts from the mounting screws but leave mounting screws in the plate as positioned.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Determine the desired height of the fixture with the provided stems and assemble the fixture accordingly. **Please note:** the 6" stem must be installed at the top or bottom of the fixture before attaching any additional 12" stems.
4. Feed the fixture wires through the desired number of stems.
5. Feed the fixture wires through the swivel joint and canopy.
6. Once the desired height is reached, screw the entire stem assembly together.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to the negative (-) output driver wire (negative to negative)
 - b) Positive (+) fixture wire to the positive (+) output driver wire (positive to positive)
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. While supporting the fixture, align the holes on the canopy with the mounting studs and push the canopy into place against the mounting plate, so that the mounting studs poke through.
2. Secure the canopy in place by screwing the cap nuts back on the mounting studs.
3. Remove retaining ring and glass holder from socket.
4. Slide glass, then glass holder over socket and secure by gently threading glass retaining ring through the socket. Using a retaining-ring tool (not included) can facilitate this.
5. Install bulb. Refer to the label on the socket for max wattage information.