


## HANFORD ONE LIGHT MINI PENDANT

6124501

### General Product Information




BULB(S)  
(NOT INCLUDED)



DIMMER  
COMPATIBLE



LED



NEC COMPLIANT  
JUNCTION BOX



DAMP LOCATION  
SAFE



PLEASE SEE  
[visualcomfort.com](http://visualcomfort.com)  
FOR PRODUCT  
SPECS




CLEAN WITH SOFT,  
DRY CLOTH ONLY. NO  
HARSH CHEMICALS!



BEST PRACTICE:  
HANDLE FIXTURE  
WITH GLOVES



WARRANTY



FCC STATEMENT

### Tools Required



PHILLIPS-HEAD  
SCREWDRIVER

### Safety Information

#### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



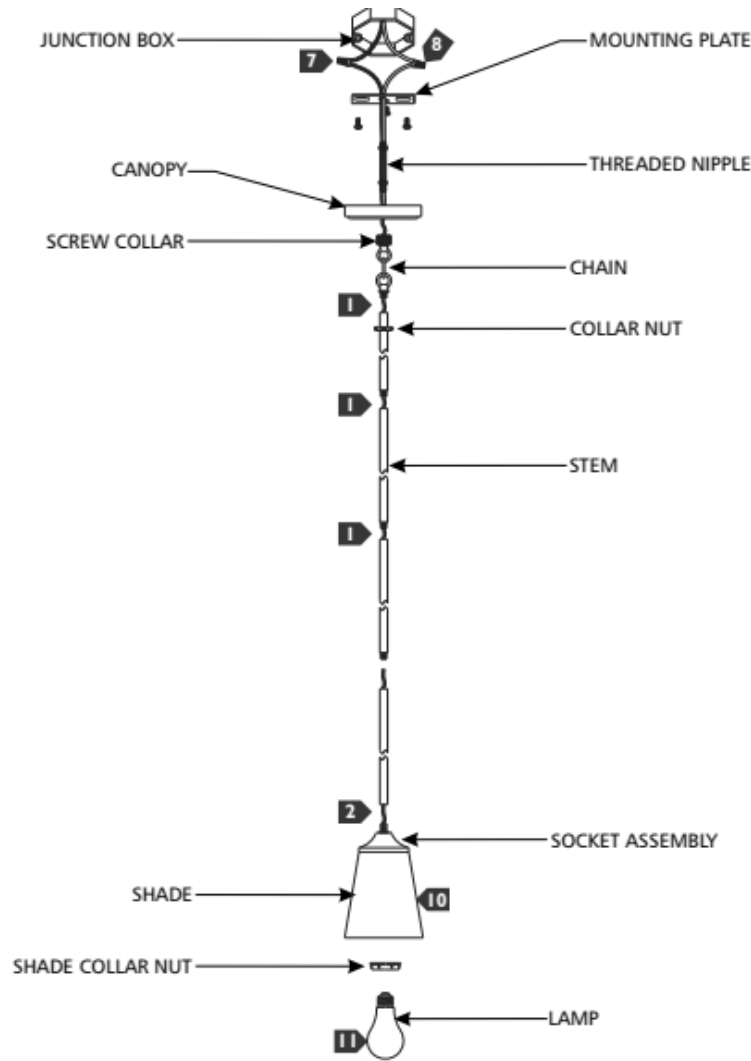

## INSTRUCTIONS

### I. Preparing the Fixture

1. Determine the desired height or look of the fixture with the provided stems and/or chain and screw them together to assemble them. All parts may be used alone or in combination.
2. Feed the fixture wires through the stems/chain and screw to the socket assembly.
3. Unscrew the collar nut from the screw collar and place it onto the stem/chain followed by the canopy.
4. Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
5. Align and secure the mounting plate to the junction box.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire

b) Black fixture wire to hot power line wire

4. Neatly place all wires into the junction box, place the canopy onto the ceiling, and screw the collar nut tightly onto the screw collar to secure it in place.
5. Place the shade onto the socket and tightly screw the shade collar nut onto the socket using the shade tool to secure it.
6. Screw the lamp into the socket to complete installation.