


ALTURAS ONE LIGHT MINI PENDANT

6124601

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



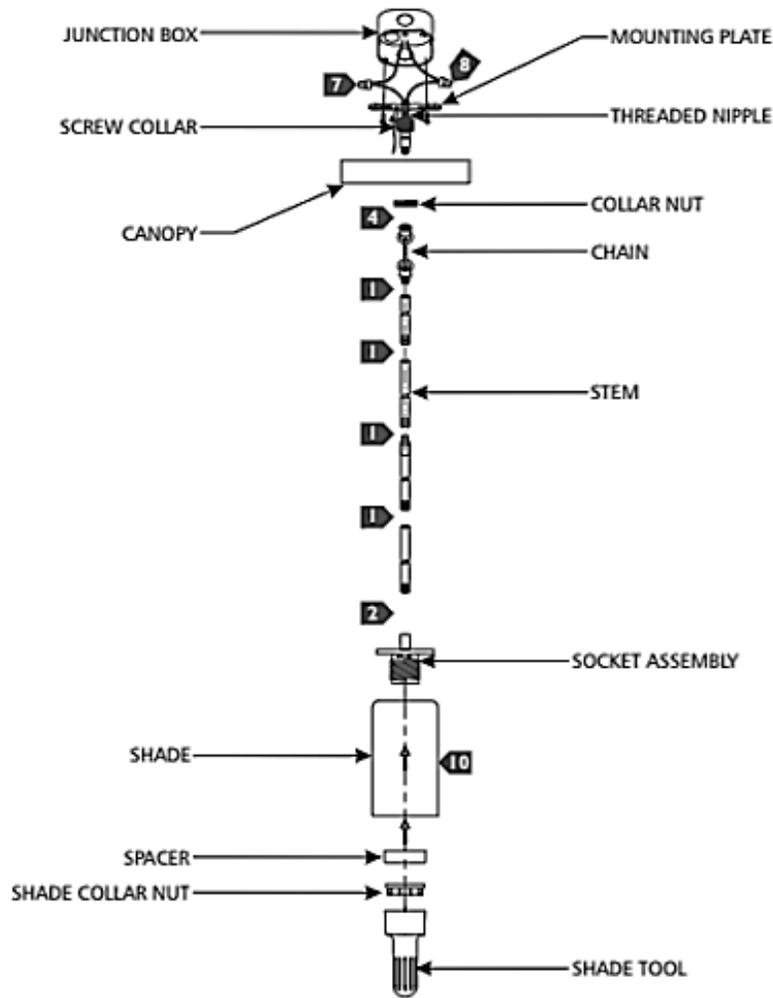

INSTRUCTIONS

I. Preparing the Fixture

1. Determine the desired height or look of the fixture with the provided swivel, stems, and chain. Screw them together to assemble. All parts may be used alone or in combination.
2. Feed the fixture wires through the stems/chain and screw the stem assembly to the socket assembly.
3. Unscrew the collar nut from the screw collar and place it onto the stem/chain followed by the canopy.
4. Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
5. Align and secure the mounting plate to the junction box.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto socket using the shade tool.
2. Screw the lamp into the socket to complete installation.