




# CANFIELD ONE LIGHT PENDANT AND MINI-PENDANT

6128801; 6528801

## General Product Information



## Suggested/Required Tools



## Safety Information

### CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.



**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

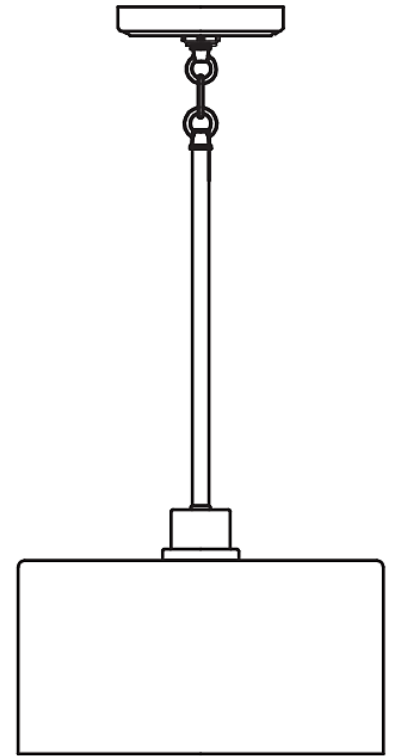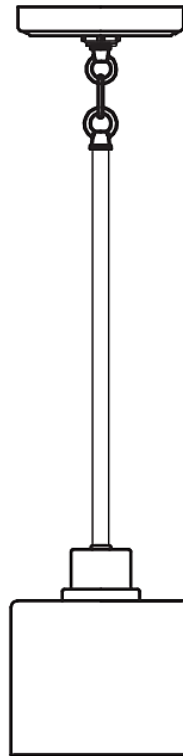

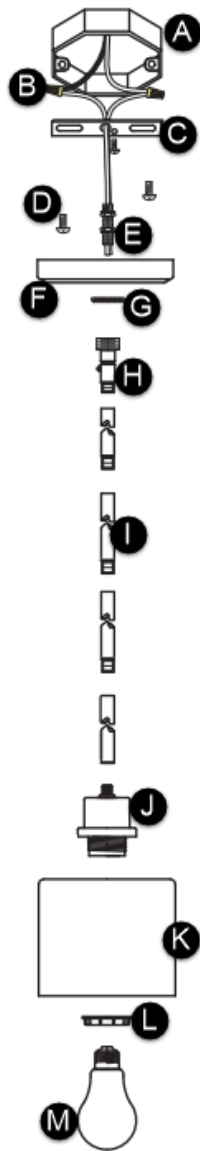

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Threaded Nipple
- F. Canopy
- G. Collar Nut
- H. Screw Collar Assembly
- I. Stem
- J. Socket
- K. Shade
- L. Shade Collar Nut
- M. Bulb (Not Included)
- N. Chain

## INSTRUCTIONS

### I. Preparing the Fixture

1. Determine the desired height or look of the fixture with the provided swivel, stems and/or chain and assemble them by screwing them together. All the parts may be used alone or in combination.
2. Feed the fixture wires through the stems and screw to the fixture tightly.
3. Screw the collar nut down until it is loose on the stem, then slide the canopy onto the stem.
4. Screw the shorter end of the threaded nipple tightly onto the mounting plate.
5. Feed the fixture wires through the mounting plate/threaded nipple assembly and screw it tightly onto the screw collar.
6. Align the mounting plate to the junction box and secure the fixture tightly with two mounting plate screws.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black/smooth) to hot power line wire
  - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Place the shade onto the shade base and secure it in place by installing and screwing the shade collar nut onto the socket until snug.
3. Screw the bulb into the socket to complete installation. Refer to the socket label for max wattage information.