



DIVISION STREET PENDANT

6517401; 6517491S

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

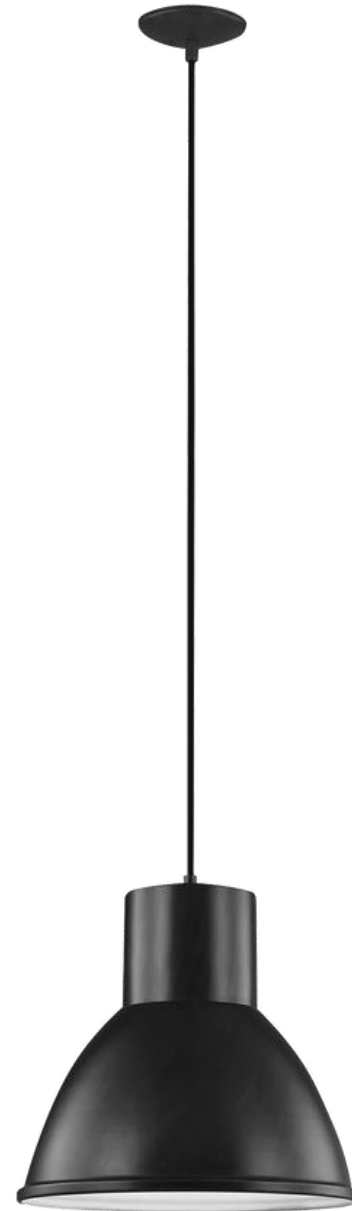

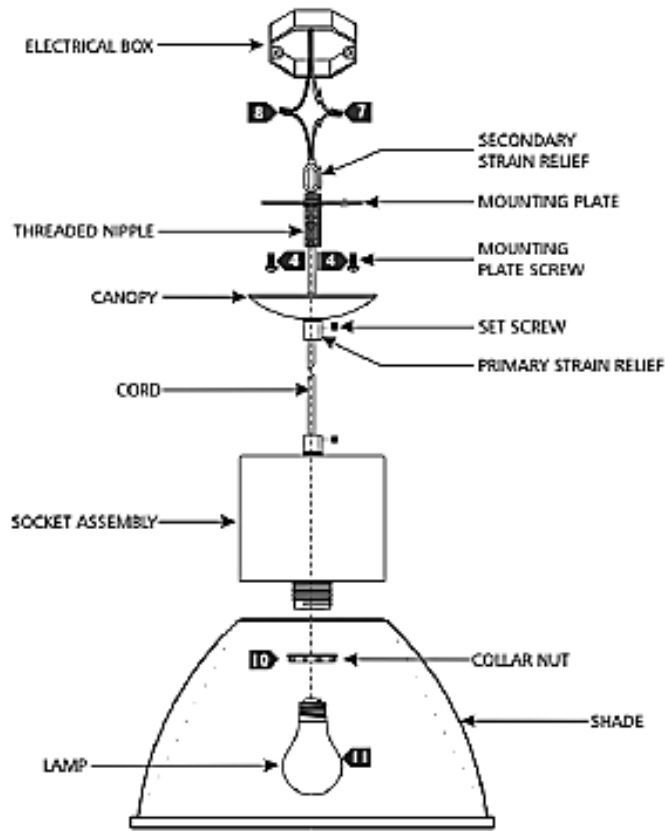

INSTRUCTIONS

I. Preparing the Fixture

1. Feed the cord through the primary strain relief, canopy, threaded nipple, and second strain relief. Then, tighten the set screw.
2. Determine the desired height of the fixture by raising the canopy up to the electrical box, loosening the set screw, and moving the cord up or down. Mark cord at desired height.
3. Separate the mounting plate from the canopy by unscrewing the primary strain relief, then slide the primary strain relief and canopy down the cord.
4. Install the mounting plate to the electrical box and secure it with two mounting plate screws.
5. Trim the cord, leaving enough length for electrical connections. From the end of the cord, strip the insulation 4" and then strip the end of the wires. Note: Make sure not to nick the inner wires.

II. Wiring the Fixture

1. Connect the fixture to a suitable ground in accordance with local electrical codes.
2. Connect the following wires using a wire nut:
 - a) White fixture wire to the neutral power line wire
 - b) Black fixture wire to the hot power line wire

III. Installing the Fixture

1. Place the shade onto the socket and secure it in place by installing and tightly screwing the collar nut onto the socket.
2. Screw the lamp into the socket. Refer to the label on the socket for max wattage information.