





# HANFORD THREE LIGHT PENDANT

6624503

## General Product Information



## Suggested/Required Tools



## Safety Information

### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

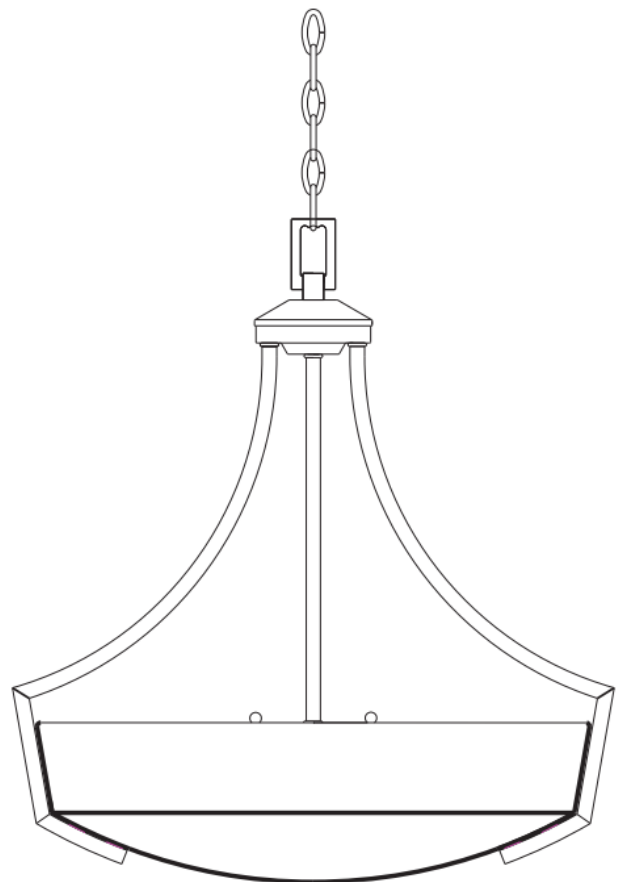

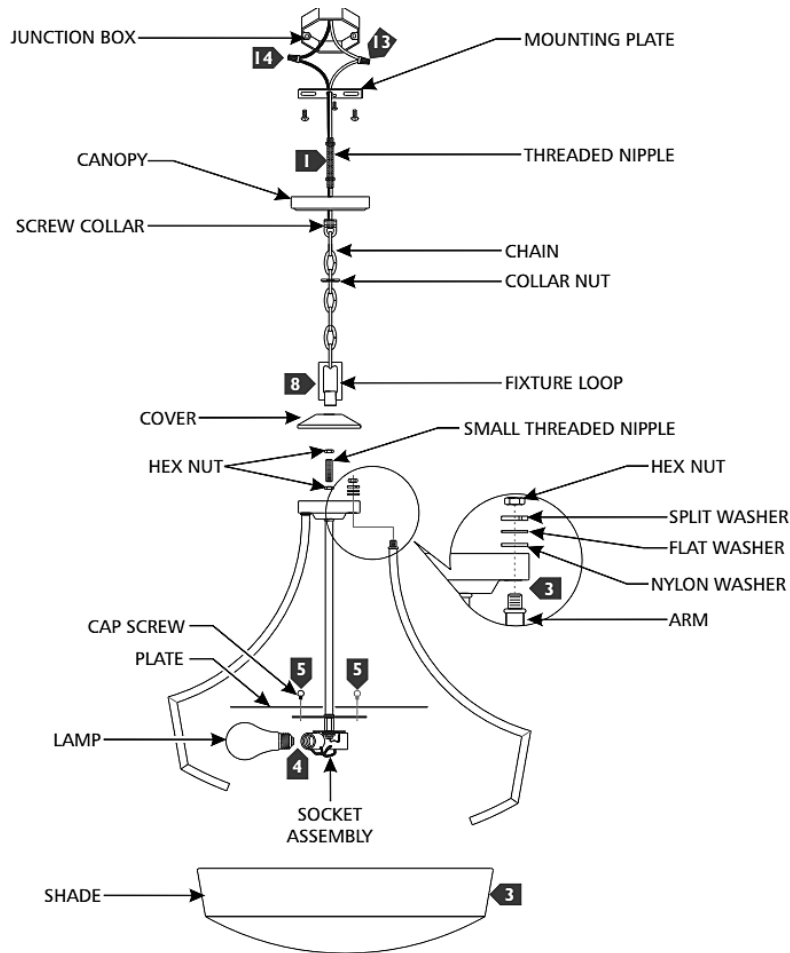

## INSTRUCTIONS

### I. Preparing the Fixture

1. Screw the threaded nipple to the mounting plate and screw the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Install two of the fixture arms to the hub using the washers and hex nuts in the order shown, then place the shade inside the fixture arms and secure it in place by installing the remaining fixture arm.
4. Screw the lamps into the sockets. Refer to the socket label for max wattage information.
5. Install the plates to the socket assembly using the cap screws.
6. Install a hex nut onto each end of the small threaded nipple and screw it to the top of the fixture.
7. Determine the desired height of the fixture and remove a portion of the chain by opening a link with pliers.
8. Place the cover onto the small threaded nipple and screw the fixture loop onto the fixture. Open the chain link with pliers and install the chain on the fixture loop, then close the chain link.
9. Unscrew the collar nut from the screw collar, then install the collar nut and the canopy onto the chain (in that order).
10. Open a link on the other end of the chain with pliers and install the chain onto the screw collar. Close the link.
11. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black/smooth) to hot power line wire
  - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.