

LEO HANGING GLOBE ONE-LIGHT WALL/CEILING SEMI-FLUSH MOUNT

7518; 7501801

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

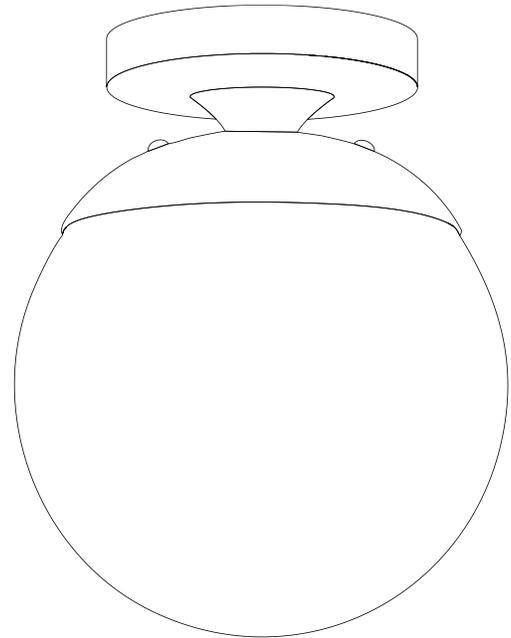

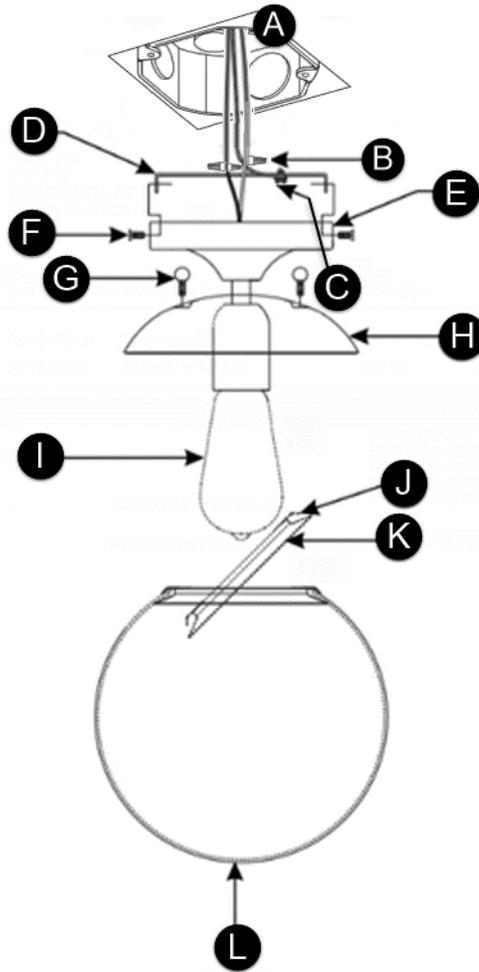

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Ground Screw
- D. Mounting Plate
- E. Canopy
- F. Canopy Screws
- G. Cover Screws
- H. Cover
- I. Bulb (Not Included)
- J. Clip
- K. Shade Bracket
- L. Glass Globe Shade

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box.
2. Screw the bulb into the socket. Refer to the label on the socket for max wattage information.
3. Install the shade bracket by doing the following:
 - a) Lift up the clips on the shade bracket.
 - b) Insert the shade bracket into the shade at an angle.
 - c) Snap the clips back down onto the top of the shade.
4. Align the holes on the shade bracket with the holes on the cover and secure it in place with the cover screws.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or an earth wire (green, yellow, or bare).
3. Connect the following pairs of wires together using wire nuts to secure a connection:
 - a) White (neutral) fixture wire to neutral power line wire
 - b) Black (positive) fixture wire to positive power line wire
4. Neatly tuck all the wires into the ceiling/canopy.
5. Lift the canopy onto the mounting plate and secure it in place with the canopy screws.