




# HANFORD THREE LIGHT CEILING CONVERTIBLE PENDANT

7724503

## General Product Information



## Suggested/Required Tools



## Safety Information

### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



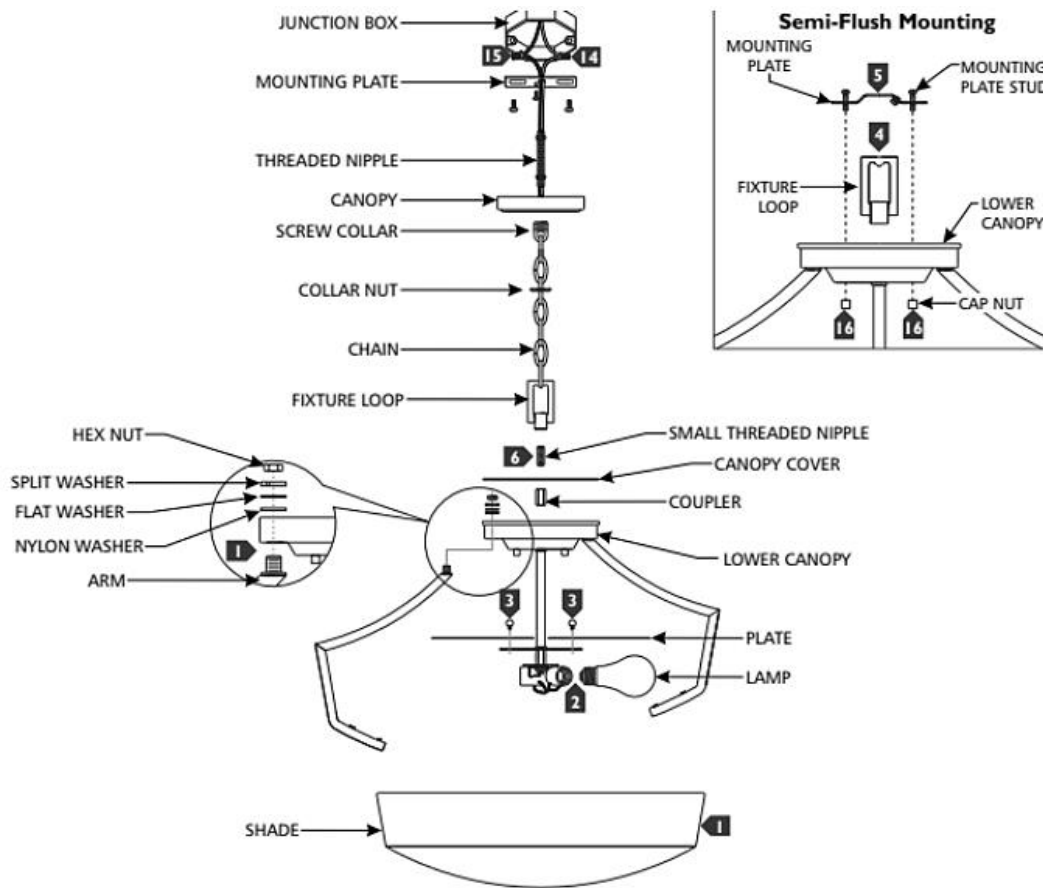

## INSTRUCTIONS

### I. Preparing the Fixture

1. Install two of the fixture arms to the lower canopy using the washers and hex nuts in the order shown, then place the shade inside the fixture arms. Install the remaining fixture arm to secure it in place.
2. Screw the lamps into the sockets. Refer to the label in the socket for max wattage information.
3. Install the plates to the socket assembly using the cap screws.
4. **For Semi-Flush Mount Only:** Unscrew and remove the fixture loop from the lower canopy, then remove the cap nuts.
5. **For Semi-Flush Mount Only:** Install the mounting plate with two mounting studs to the junction box.
6. Screw the small threaded nipple to the coupler, screw the coupler to the top of the lower canopy, place the canopy cover onto the small threaded nipple, and screw the fixture loop on to secure it in place.
7. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
8. Unscrew and remove the collar nut from the screw collar, then screw the screw collar tightly onto the threaded nipple.
9. Secure the mounting plate to the junction box.
10. Feed the cord through the fixture loop and screw it onto the canopy. Determine the desired height of the fixture and open a link to remove a portion of the chain.
11. Install the canopy and collar nut onto the chain, then install the open link onto the fixture loop and close the link to secure it in place.
12. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, smooth) to hot power line wire
  - b) Neutral fixture wire (white, textured) to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

### III. Installing the Fixture

1. **For Semi-Flush Mount Only:** Align, then place the lower canopy onto the mounting plate studs. Secure with two cap nuts.
2. Neatly place all wires into the junction box, place the canopy onto the ceiling, and screw the collar nut tightly onto the screw collar to secure it in place.