

## EMMONS 2 LIGHT FLUSH MOUNT

7739002

## General Product Information



Intertek

SAVE THESE  
INSTRUCTIONS!STANDARD  
INSTALLATION

INDOOR

DAMP LOCATION  
SAFENEC COMPLIANT  
JUNCTION BOX

LED

PLEASE SEE  
visualcomfort.com  
FOR PRODUCT  
SPECSCLEAN WITH SOFT,  
DRY CLOTH ONLY. NO  
HARSH CHEMICALS!BEST PRACTICE:  
HANDLE FIXTURE  
WITH GLOVES

Product Warranty



FCC Statement

## Suggested/Required Tools



ELECTRIC DRILL

PHILLIPS-HEAD  
SCREWDRIVER

PENCIL/MARKER



WIRE CUTTER

## Safety Information

## CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



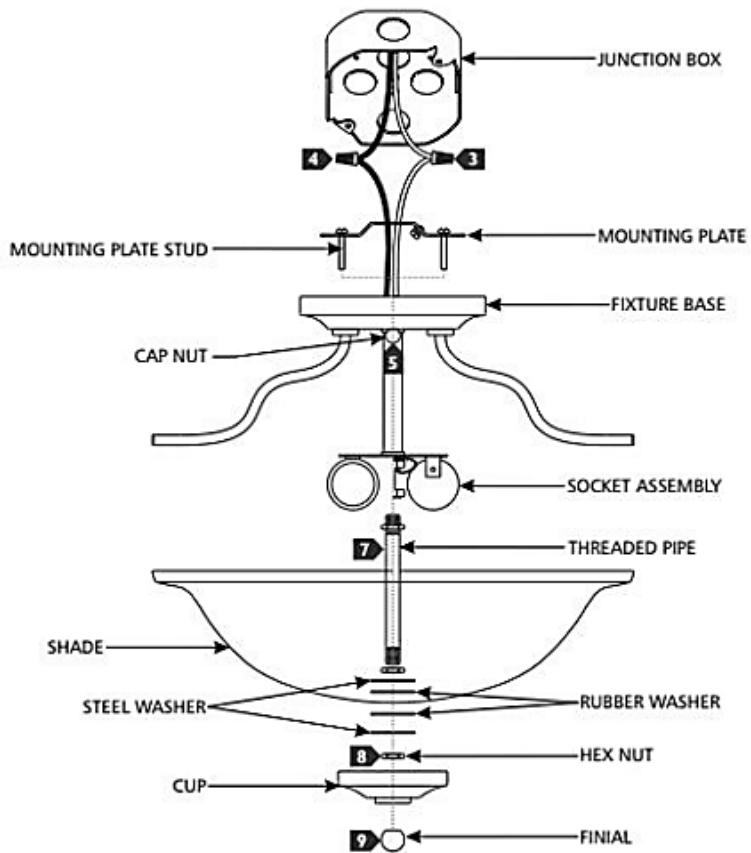

## INSTRUCTIONS

### I. Preparing the Fixture

1. Secure the mounting plate to the junction box.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire to hot power line wire
  - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Place the fixture base onto the mounting plate studs and secure it in place by screwing the cap nuts onto the mounting plate studs.
2. Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.
3. Install a hex nut onto each end of the threaded pipe, then screw the threaded pipe to the bottom of the socket assembly.
4. Place a steel washer, rubber washer, shade, rubber washer, and steel washer in that order onto the threaded pipe and secure in place by screwing a hex nut onto the threaded pipe.
5. Place the cup onto the threaded pipe and secure it by screwing the finial onto the threaded pipe.