


MULLBERRY HILL OUTDOOR LANTERN

8588-10/12/15/155, 8788-12/15/155

General Product Information

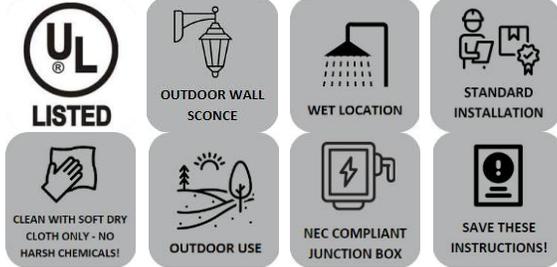

CAUTION: To reduce the risk of electrical shock, provide a watertight seal between the fixture and the mounting surface by using a silicone or similar caulking.

CAUTION: Mount fixtures with photocells at least 48" from all sides to avoid reflection of light back onto the photocell, causing the photocell to malfunction or flicker.

If supply wires are located within 3" of ballast, use wire rated for at least 90°C.


Tools Required




CAUTION—RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
USE MINIMUM 90°C SUPPLY CONDUCTORS.

SAVE THESE INSTRUCTIONS!

DANGER!
SHOCK HAZARD
DANGER!
Turn off electrical current at the source before working with any lighting fixture or portable lamp.
Install and use this product in adherence with local electrical codes and regulations.

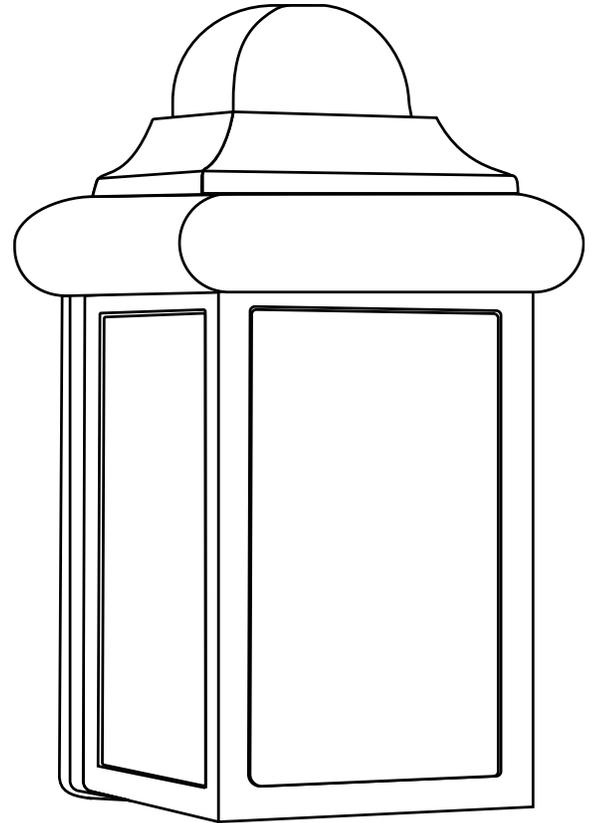

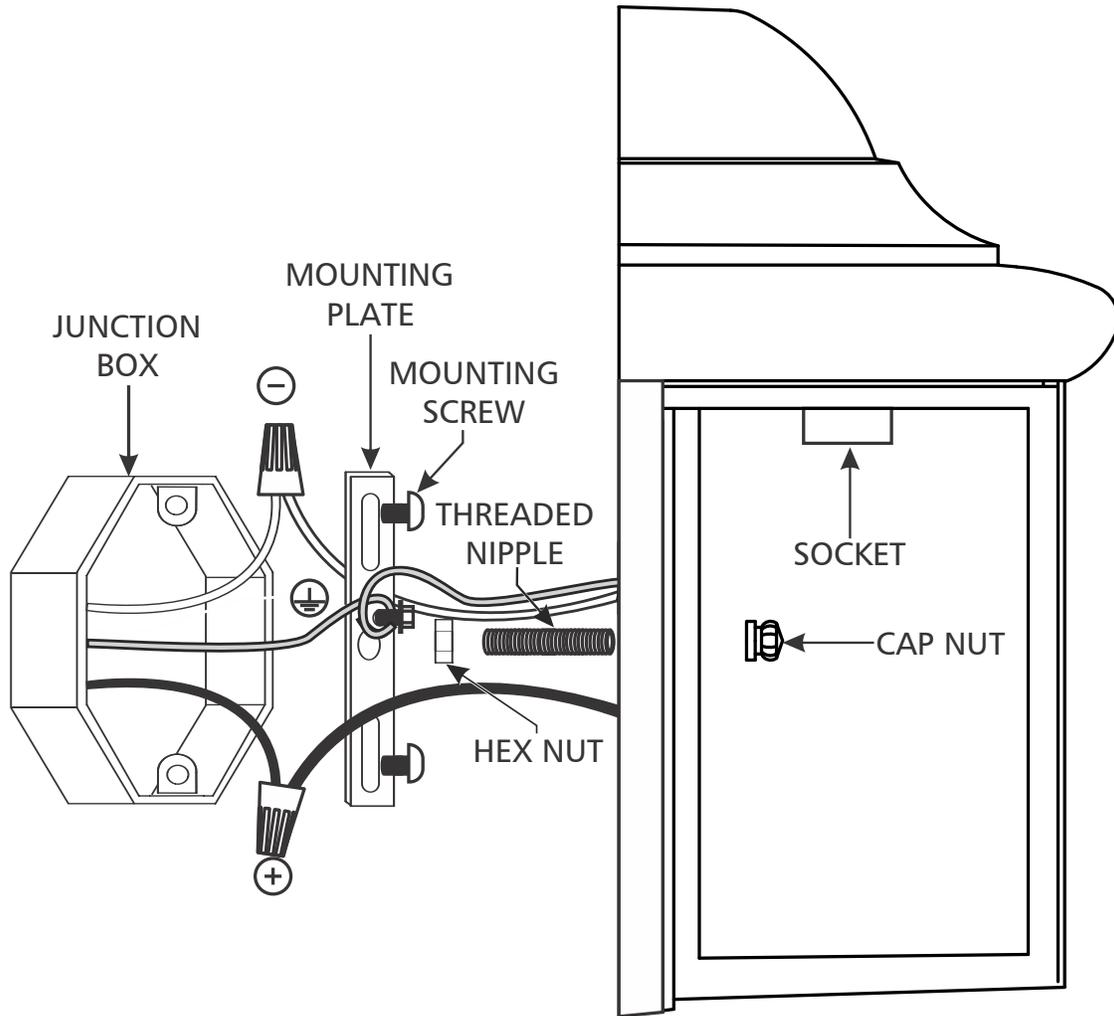

INSTRUCTIONS

I. Preparing the Fixture

1. Using mounting screws (not supplied), fasten the mounting plate to the junction box through the slots in the mounting plate.
2. Thread the nut onto the nipple so that five threads are exposed above the nut. Thread that end of the nipple into the mounting plate and tighten the hex nut against the mounting plate.

II. Wiring the Fixture

1. Connect the following wires using a wire nut:
 - a) Fixture ground wire to the supply ground wire (bare metal or green) from the junction box
Never connect ground wire to black or white power supply wires.
 - b) Fixture neutral wire (white) to the supply neutral wire (white)
 - c) Fixture hot wire (black) to the supply hot wire (black)

CAUTION: Do not reverse the hot and neutral connections.

2. Tuck all wires into the junction box. Make sure no bare wires are visible outside the wire nuts.

III. Installing the Fixture

1. Push the fixture firmly over the mounting nipple and against the wall. Secure the canopy in place by threading the cap nut onto the nipple.
2. Install the lamps.