

ONE LIGHT OUTDOOR WALL LANTERN

8709P-12; 8909PEN3-12

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.
Install and use this product in adherence with local electrical codes and regulations.



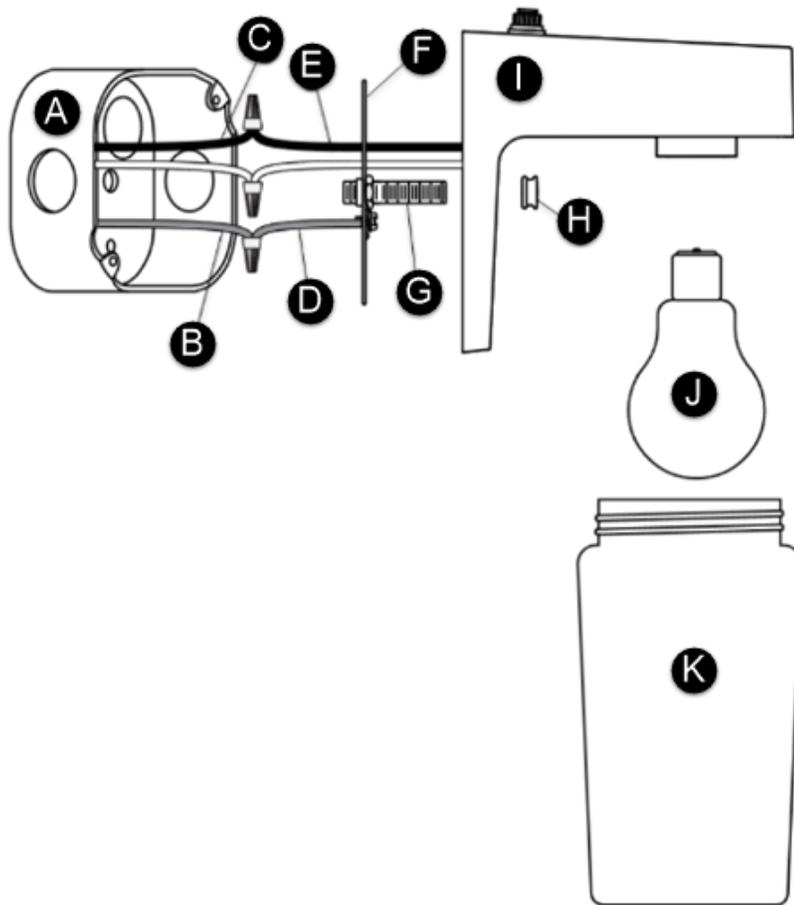

FIXTURE PARTS

- A. Junction box
- B. Neutral Wire
- C. Hot Wire
- D. White Fixture Wire
- E. Black Fixture Wire
- F. Mounting Plate with Mounting Screws
- G. Threaded Nipple
- H. Cap Nut
- I. Fixture
- J. Bulb (Not Included)
- K. Shade

INSTRUCTIONS

I. Preparing the Fixture

1. Assemble the mounting plate by installing the nut onto the threaded nipple leaving three threads exposed above the nut. Then screw the shorter end of the threaded nipple to the mounting plate.
2. Install the mounting plate to the junction box and secure it using mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture base onto the threaded nipple and secure it by tightening the cap nut onto the threaded nipple.
2. Screw the bulb into the socket. Refer to the label on the socket for max wattage information.
3. Place the gasket on the lip of the shade, then insert the shade into the fixture so that shade lip is above the inner tab and secure it in place using the shade screw.
4. For wet locations, caulk around the base of the fixture with waterproof construction sealant.