

ONE LIGHT OUTDOOR WALL LANTERN

8750

General Product Information

 <p>ETL US Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>STANDARD INSTALLATION</p>	 <p>INDOOR</p>
 <p>WET LOCATION SAFE</p>	 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>BULB(S) (NOT INCLUDED)</p>	 <p>TITLE 24 COMPLIANT</p>
 <p>PLEASE SEE visualcomfort.com FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT DRY CLOTH ONLY. NO HARSH CHEMICALS!</p>	 <p>BEST PRACTICE: HANDLE TEXTURE WITH GLOVES</p>	 <p>LED</p>



WARRANTY



FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



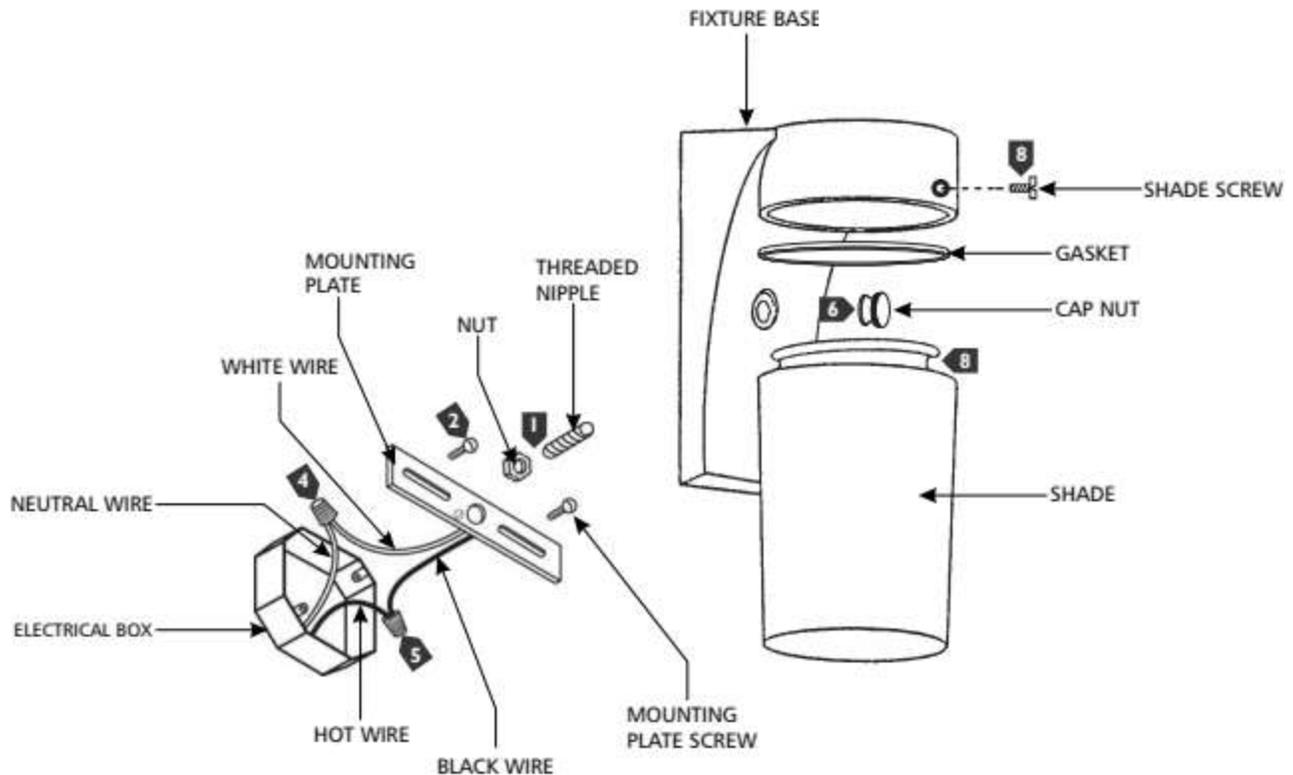

INSTRUCTIONS

I. Preparing the Fixture

1. Assemble the mounting plate by installing the nut onto the threaded nipple, leaving three threads exposed above the nut, then screw the shorter end of the threaded nipple to the mounting plate.
2. Secure the mounting plate to the electrical box with two mounting plate screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Place the fixture base onto the threaded nipple and secure it by tightening the cap nut onto the threaded nipple.
5. Screw the lamp into the socket.
6. Place the gasket on the lip on the shade, then insert the shade into the fixture so that the shade lip is above the inner tab and secure it in place using the shade screw. **Note:** For item 8301, the shade must be screwed into the fixture.
7. For wet locations, caulk around the base with waterproof construction sealant.