

Mitte Flush Mount

7541502 | 1.0

GENERATION LIGHTING

SAVE THESE INSTRUCTIONS!

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

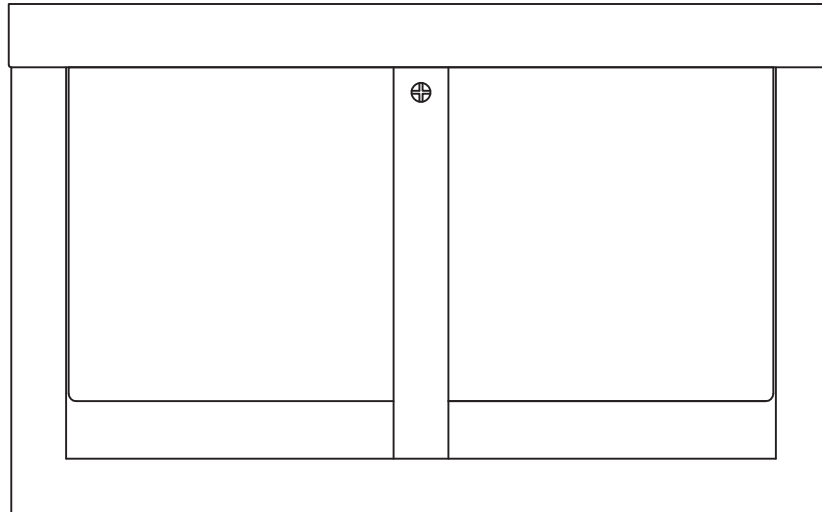

GENERATION LIGHTING


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

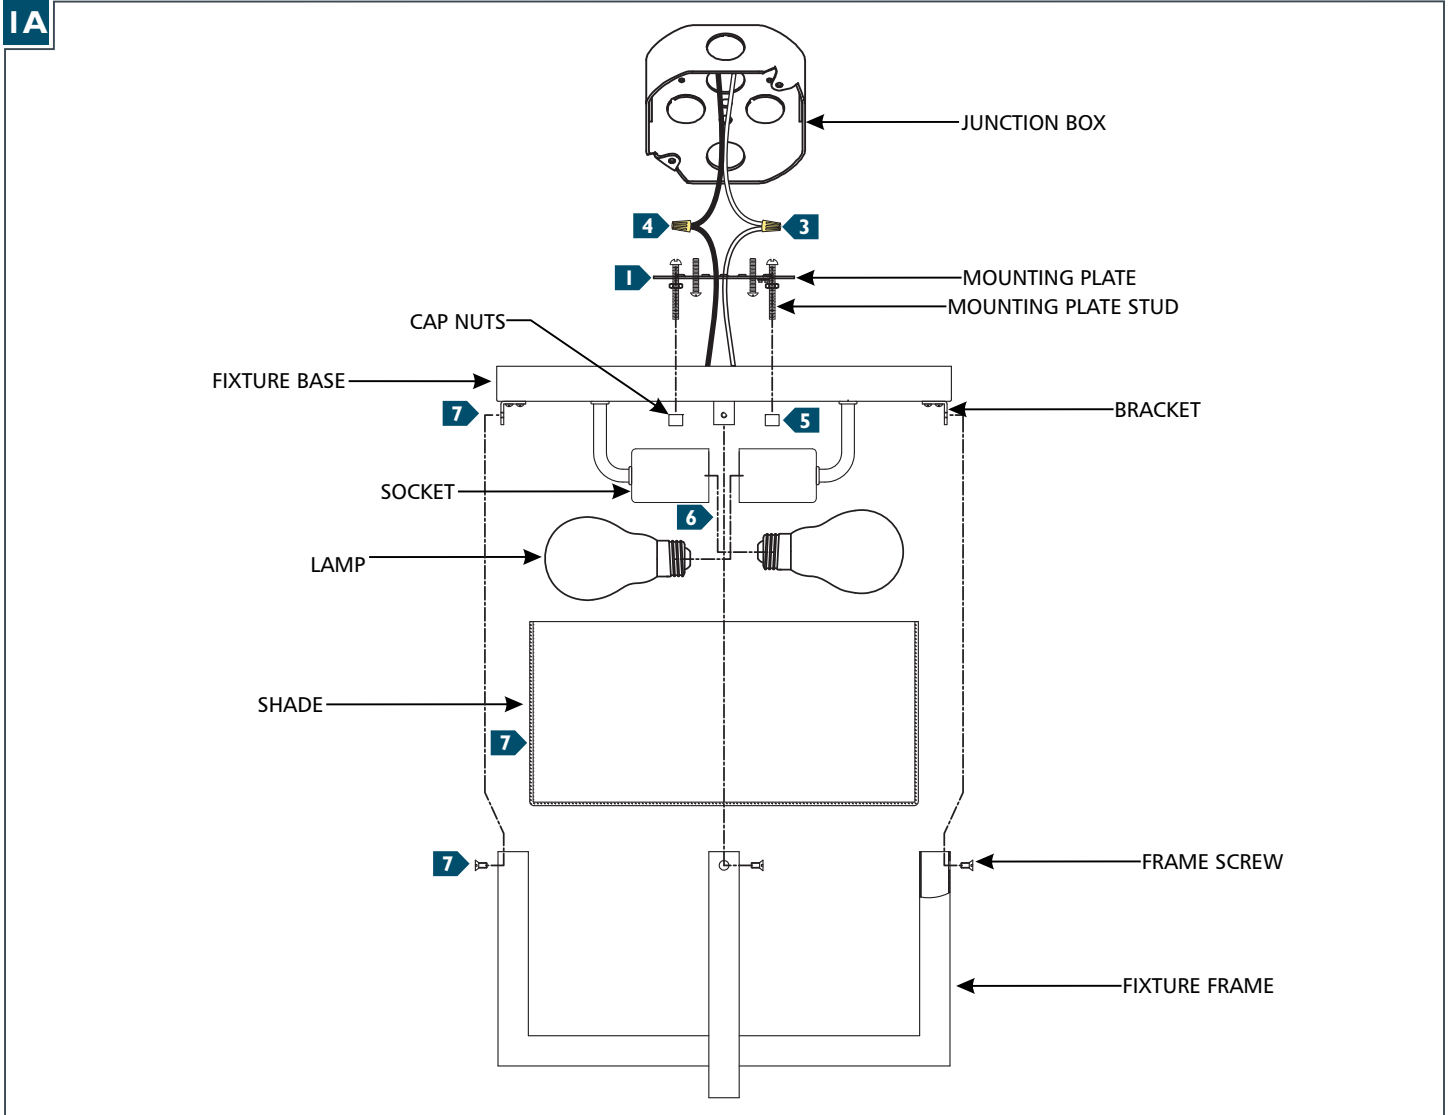

- 1 Secure the mounting plate to the junction box.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- 5 Install the fixture base by aligning it to the studs on the mounting plate and secure it to the ceiling with two cap nuts.
- 6 Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information..
- 7 Place the shade into the fixture frame, align the holes in the frame to the brackets on the fixture base and secure them in place with the frame screws.