




## RAVENWOOD MANOR 5 & 9 LIGHT CHANDELIER

3110205, 3110209

### General Product Information



WARRANTY



FCC STATEMENT

### Tools Required



### Safety Information

#### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



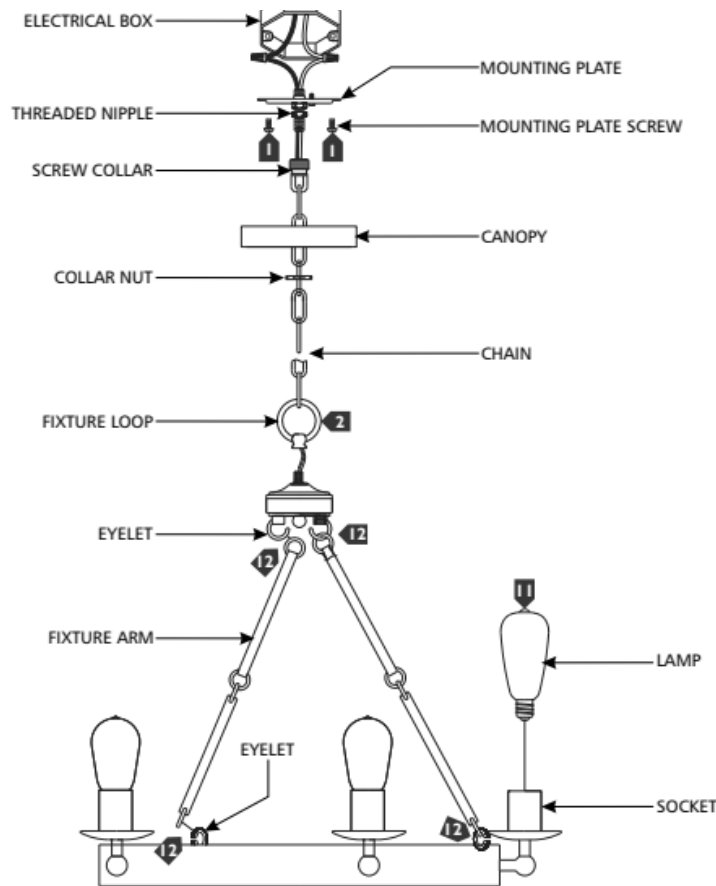

## INSTRUCTIONS

### I. Preparing the Fixture

1. Secure the mounting plate to the electrical box with the two provided mounting plate screws.
2. Screw the fixture loop onto the fixture.
3. Temporarily unscrew and remove the collar nut and screw the screw collar tightly onto the threaded nipple.
4. Determine desired height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
5. Install the canopy and collar nut onto the chain, then install the open link onto the fixture loop and secure it in place by closing the link.
6. Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the electrical box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire

### III. Installing the Fixture

1. Carefully tuck all the wires into the junction box, place the canopy onto the ceiling, and secure in place by screwing the collar nut tightly onto the screw collar.

2. Carefully tuck all the wires in the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
3. Screw the lamps into the sockets.
4. With the help of another person, connect the lower portion of the chandelier to the top by hooking each fixture arm into the corresponding eyelets.