
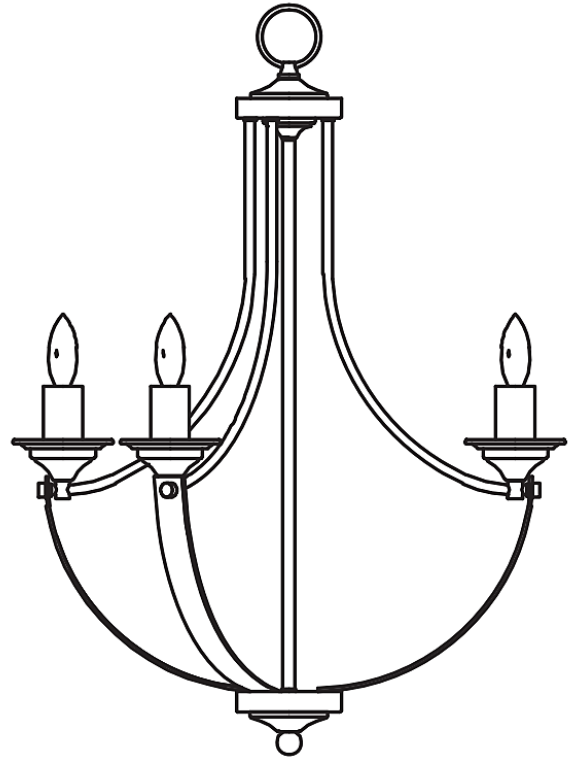



CORBEILLE 5 LIGHT CHANDELIER

3280405

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

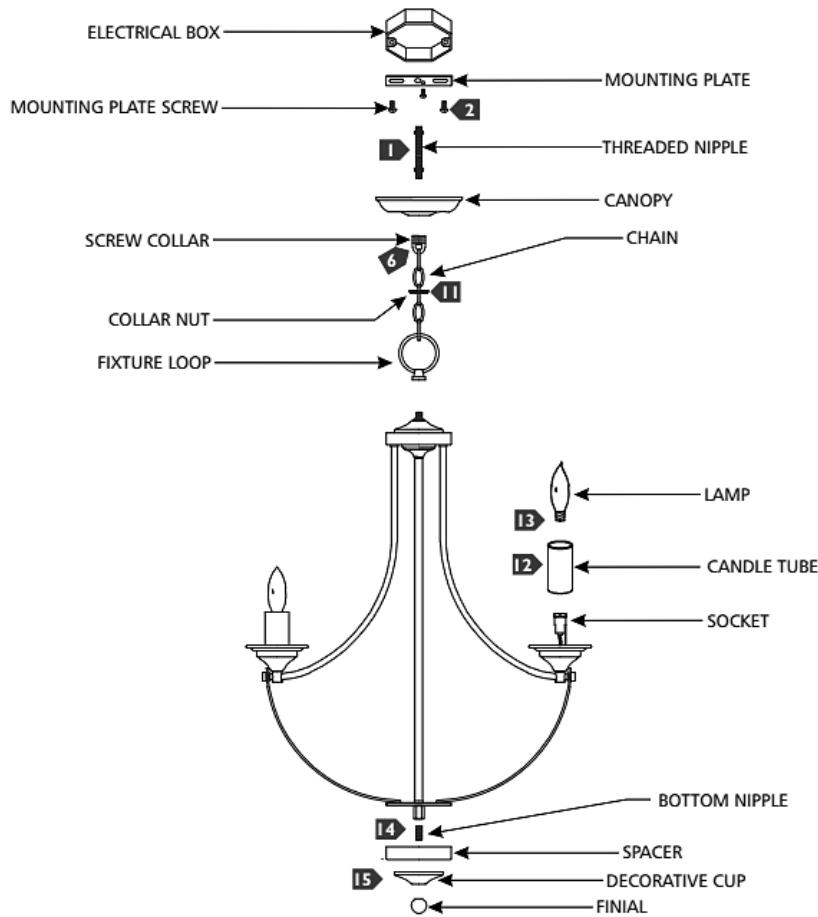

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the electrical box with two mounting plate screws.
3. Determine the desired height of the fixture and remove a portion of the chain by opening a link with pliers.
4. Screw the fixture loop onto the fixture. Open the chain link with pliers and install the chain onto the fixture loop. Close the chain link.
5. Unscrew the collar nut from the screw collar and install the collar nut and the canopy onto the chain.
6. Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture. Close the link.
7. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the electrical box. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black, smooth) to hot power line wire
 - b) Neutral fixture wire (white, textured) to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate with screw collar and secure it in place by screwing the collar nut tightly onto it.
2. Slide the candle tubes over the sockets.
3. Screw the lamps into the sockets. Refer to the labels on the sockets for max wattage information.
4. Screw the bottom threaded nipple into the fixture.
5. Install the spacer and the decorative cup. Secure them in place by screwing on the finial.