














STONE STREET ONE LIGHT PENDANT

6514401

General Product Information

 <p>Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>STANDARD INSTALLATION</p>	 <p>TITLE 24 COMPLIANT</p>
 <p>DAMP LOCATION SAFE</p>	 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>BULB(S) (NOT INCLUDED)</p>	 <p>DIMMER COMPATIBLE</p>
 <p>PLEASE SEE visualcomfort.com FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY; NO HARSH CHEMICALS!</p>	 <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p>	
 <p>WARRANTY</p>	 <p>FCC STATEMENT</p>		

Tools Required


 <p>PHILLIPS-HEAD SCREWDRIVER</p>
--

Safety Information

CAUTION-RISK OF FIRE

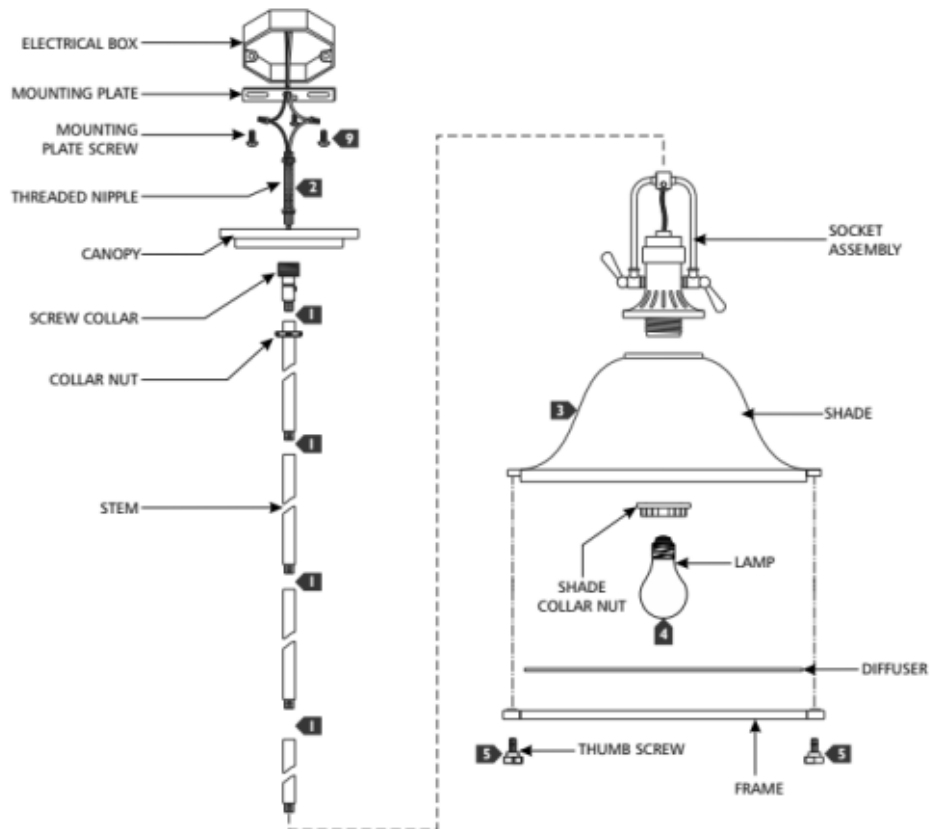
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.

 Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.





INSTRUCTIONS

I. Preparing the Fixture

1. Determine the desired height or look of the fixture with the provided stems and/or chain and screw them together to assemble. All parts may be used alone or in combination.
2. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
3. Place the shade onto the socket and tightly screw the shade collar nut onto the socket to secure.
4. Screw the lamp into the socket.
5. Place the diffuser into the frame and secure the frame to the shade using the thumb screws.
6. Feed the fixture wires through the stems/chain and screw the stem assembly to the socket assembly.
7. Unscrew the collar nut off the screw collar and place it onto the stem/chain followed by the canopy.
8. Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
9. Align the mounting plate to the electrical box and secure the fixture tightly with two mounting plate screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Carefully tuck all the wires in the junction box.

III. Installing the Fixture

1. Align the key slots on the fixture base to the mounting plate studs, place the fixture base onto the mounting plate, and secure it in place with the shade screws. Repeat for remaining shades.
2. Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.
3. Neatly place the wires into the junction box, mount the fixture base onto the mounting plate studs, and secure it with the two cap nuts.