

ALTURAS 2 LIGHT SEMI-FLUSH CONVERTIBLE PENDANT

7724602

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

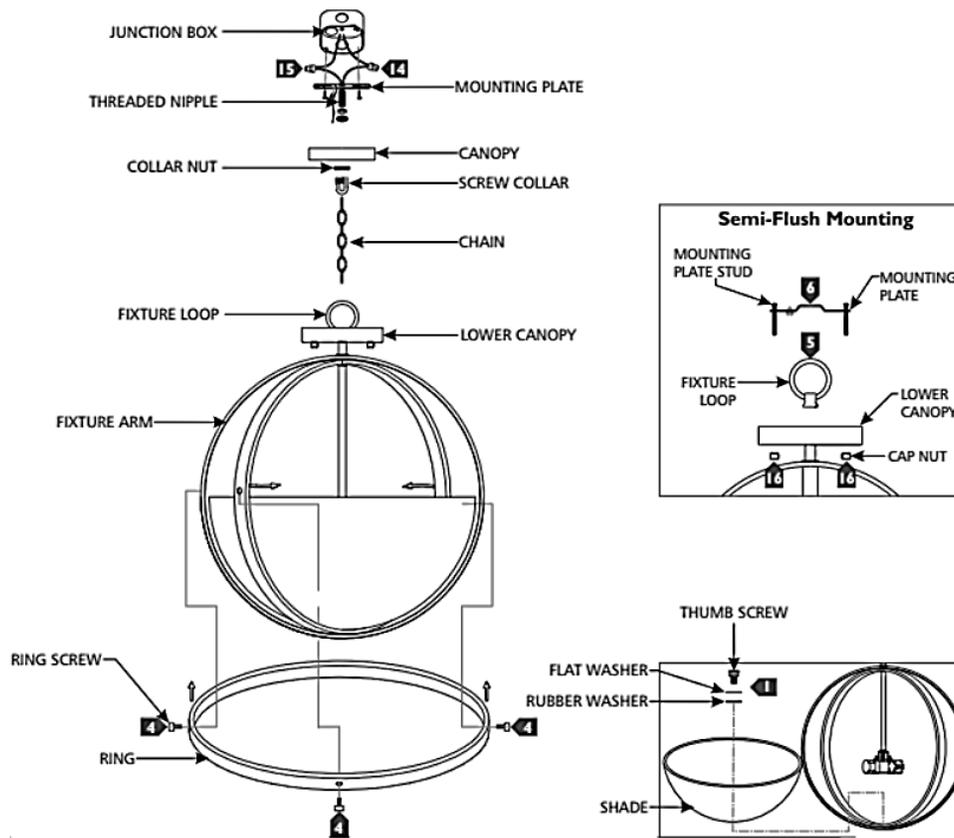

INSTRUCTIONS

I. Preparing the Fixture

1. Place the shade inside the fixture arms and secure in place with the rubber washer, flat washer, and thumb screw (in that order).
2. Spread the fixture arms until they are equally spaced apart.
3. Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.
4. Align the holes on the ring with the holes on the fixture arms and secure the ring in place with the ring screws.
5. **FOR SEMI-FLUSH MOUNT ONLY:** Unscrew and remove the fixture loop from the lower canopy, then remove the cap nuts.
6. **FOR SEMI-FLUSH MOUNT ONLY:** Install the mounting plate with two mounting studs to the junction box. **SKIP TO II. WIRING THE FIXTURE.**
7. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
8. Temporarily unscrew and remove the collar nut from the screw collar, then screw the screw collar tightly onto the threaded nipple.
9. Secure the mounting plate to the junction box.
10. Feed the cord through the fixture loop and screw it onto the canopy. Determine the desired height on the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
11. Install the canopy and collar nut onto the chain in that order, then install the open link onto the fixture loop and secure it in place by closing the link.
12. Weave the cord through the chain and canopy, then trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. **FOR SEMI-FLUSH MOUNT ONLY:** Align, then place the canopy onto the mounting plate studs and secure it with two cap nuts.
2. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.